



NCR Voyix SelfServ™ 90 (7709)

Kit Instructions

Second Display Mount



7709-K015

Issue B

Copyright and Trademark Information

The product described in this document is a copyrighted work of NCR Voyix Corporation.

NCR Voyix SelfServ™ 90 (7709) is a trademark of NCR Voyix Corporation.

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2019 – 2026

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

Confidential and proprietary information of NCR Voyix.

Use and disclose solely pursuant to company instructions.

Table of Contents

7709-K015 Second Display Mount	5
Kit Contents	6
Installation Procedures	7
Installing the Second Display Mount	8
Installing the Second Display Assembly	10

Confidential and proprietary information of NCR Voyix.

Use and disclose solely pursuant to company instructions.

Revision Record

Publication issue	Date	Description of change
A	Jun 2019	First issue.
B	Jan 2026	Updated with NCR Voyix brand.


Confidential and proprietary information of NCR Voyix.

Use and disclose solely pursuant to company instructions.

7709-K015 Second Display Mount

This publication provides procedures for installing the 7709-K015 Second Display Mount to the NCR Voyix SelfServ™ 90 (7709).

Kit Contents

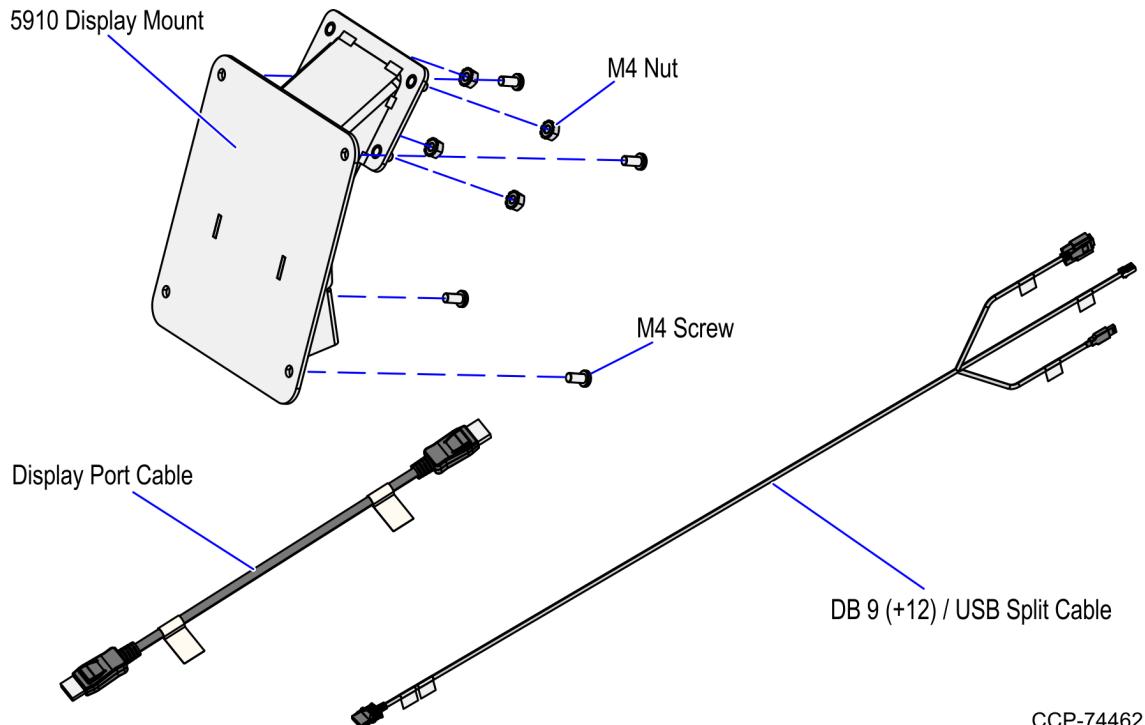

CCP-74462

Part Number	Description
497-0525141	7709-K015 Second Display Mount
795-0267101	5910 Display Mount, R6-Glory (Dark White)
009-0007087	Serrated Nut-Self Locking (Hex,M4,4.2) (4 pcs)
006-8615964	Screw,M4X8,Machine,Phil,Pan,Stl,Black (4 pcs)
497-0521788	Cable - Latch-N-Lok Usb+12V To USBa Split Rj50/Db9 1.28M
497-0512559	Cable, Display Port, 1.3M
* 497-0423108	Instructions-Kit (Reference Sheet)

* Items marked with an asterisk are not called out on the image.

Installation Procedures


Installing the Second Display Mount on an NCR Voyix 7709 unit involves the following procedures:

1. Install the Second Display Mount on the Second Display unit. For more information, refer to "[Installing the Second Display Mount](#)" on the next page.
2. Install the Second Display Assembly on the NCR Voyix 7709 kiosk. For more information, refer to "[Installing the Second Display Assembly](#)" on page 10.

Installing the Second Display Mount


To install the Second Display Mount on the Second Display unit, follow these steps:

1. Place the Second Display on a flat surface with the back facing up as shown in the image below.

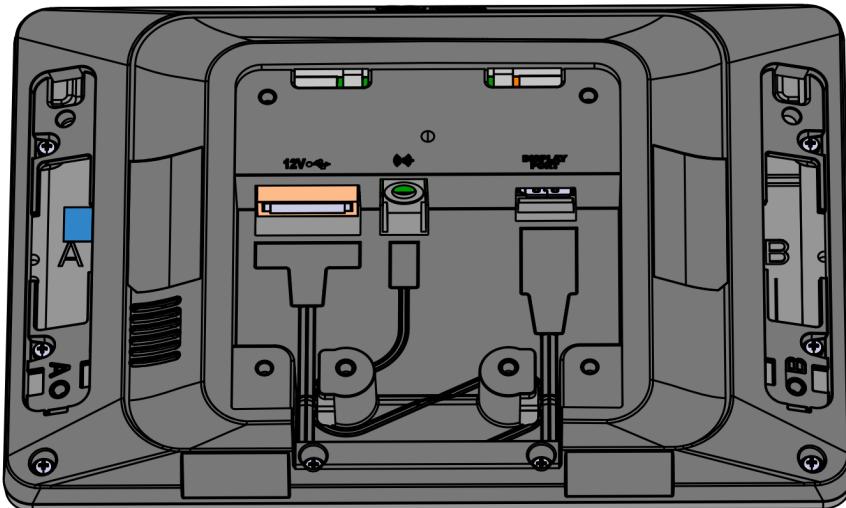


CCP-74463

2. Connect the DB9 / USB Split Cable and Display Port Cable as shown in the image below.

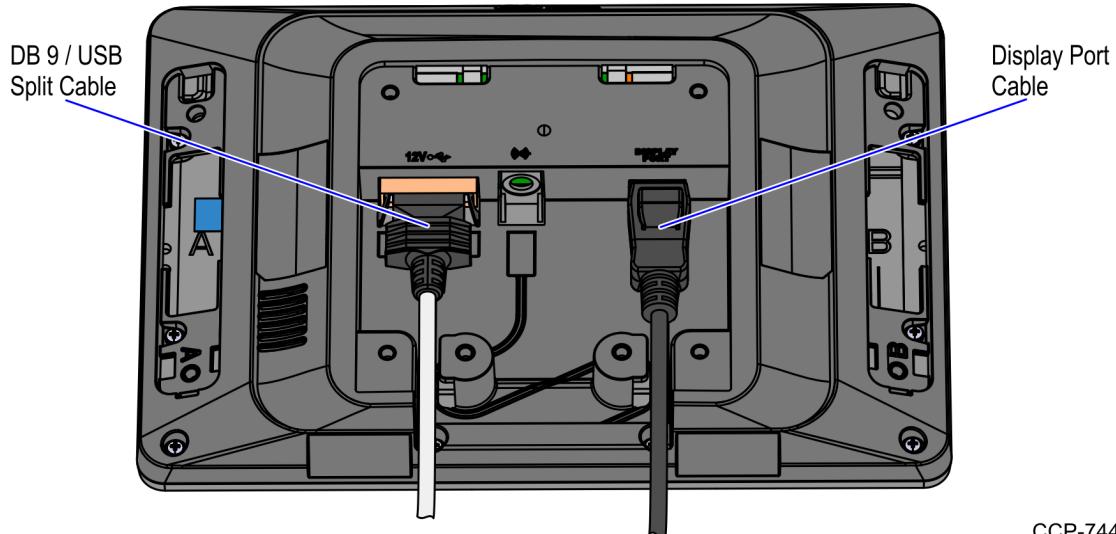


CCP-74464

3. Install and secure the Second Display Mount on the back of the Second Display unit using four M4 Screws.

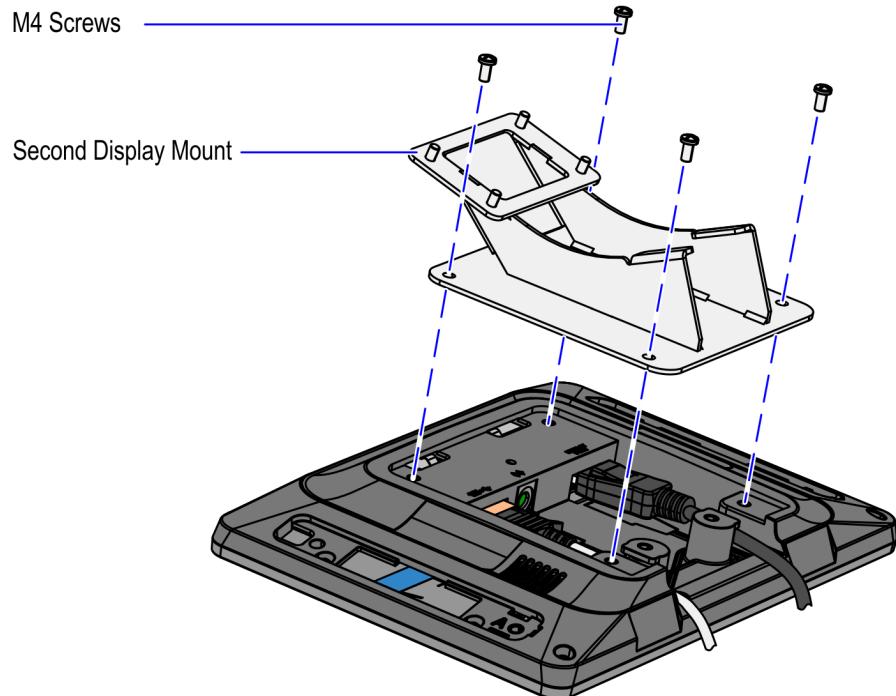

CCP-74465

4. Route the cables through the Second Display Mount hole as shown in the image below.

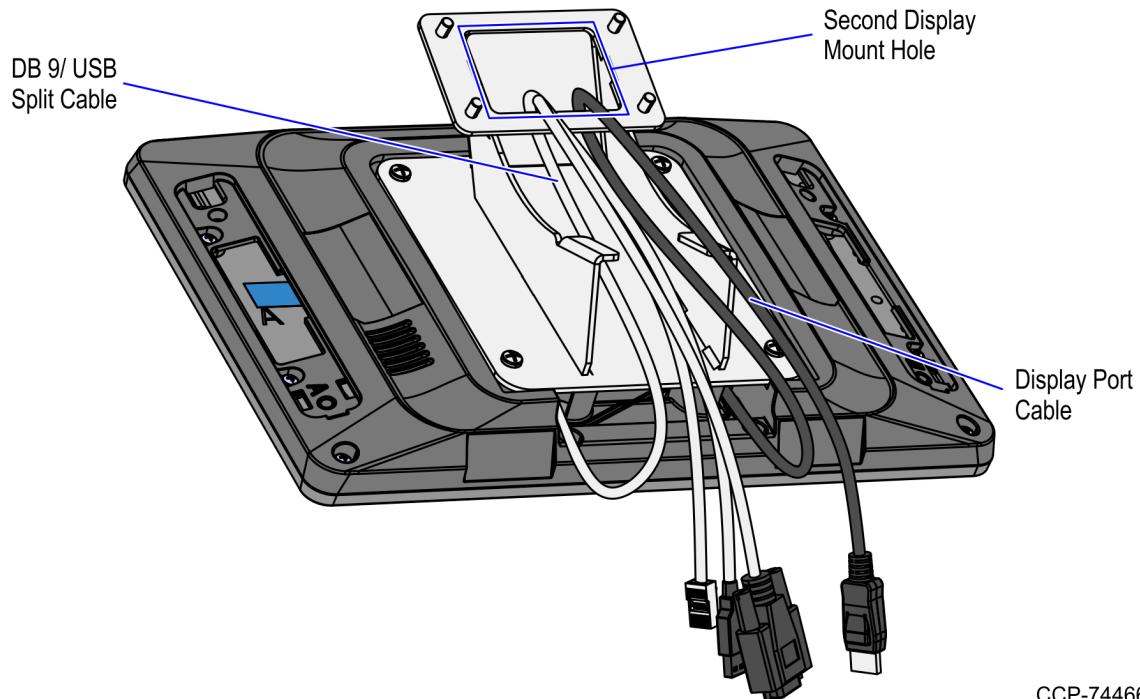


CCP-74466

5. Install the Second Display Assembly to the NCR Voyix 7709 kiosk. For more information, refer to "[Installing the Second Display Assembly](#)" on the next page.

Installing the Second Display Assembly


To install the Second Display Assembly on the NCR Voyix 7709, follow these steps:

1. Install the Second Display Mount on the Second Display unit. For more information, refer to "[Installing the Second Display Mount](#)" on page 8.
2. Insert the key into the NCR Voyix 7709 keylock, turn the key clockwise, and then carefully open the NCR Voyix 7709.

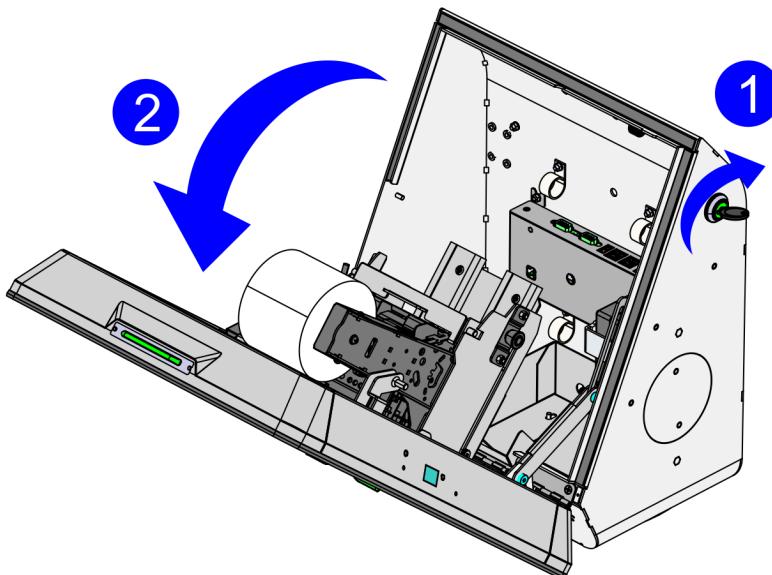

CCP-76602

3. Remove four nuts securing the Second Display Blanking.

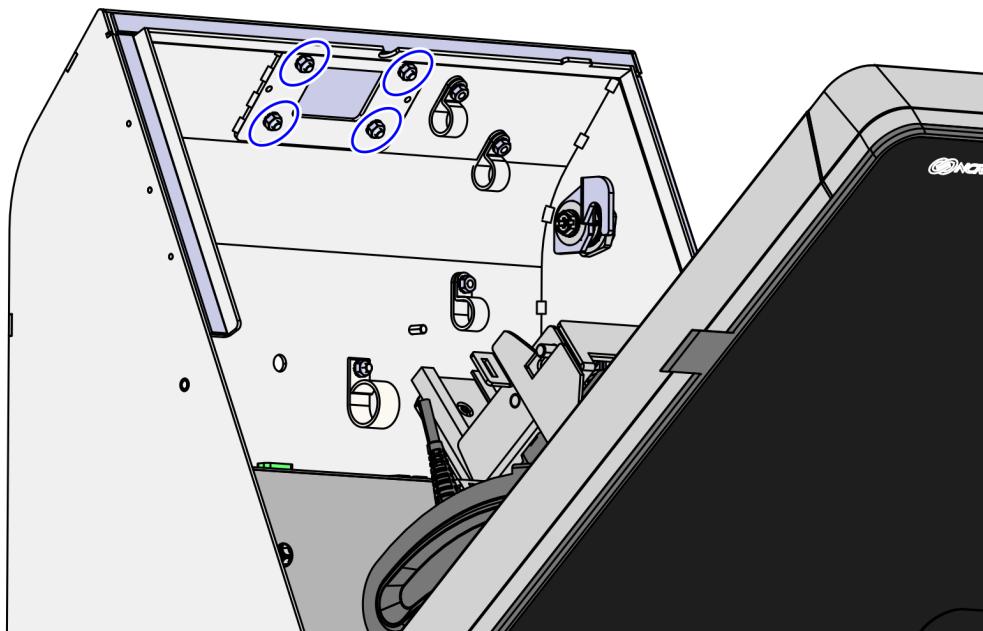


CCP-74468

4. Insert the Second Display cables through the NCR Voyix 7709 hole as shown in the image below.

Confidential and proprietary information of NCR Voyix.


Use and disclose solely pursuant to company instructions.

5. Install and secure the Second Display Assembly on the NCR Voyix 7709 using four M4 nuts.

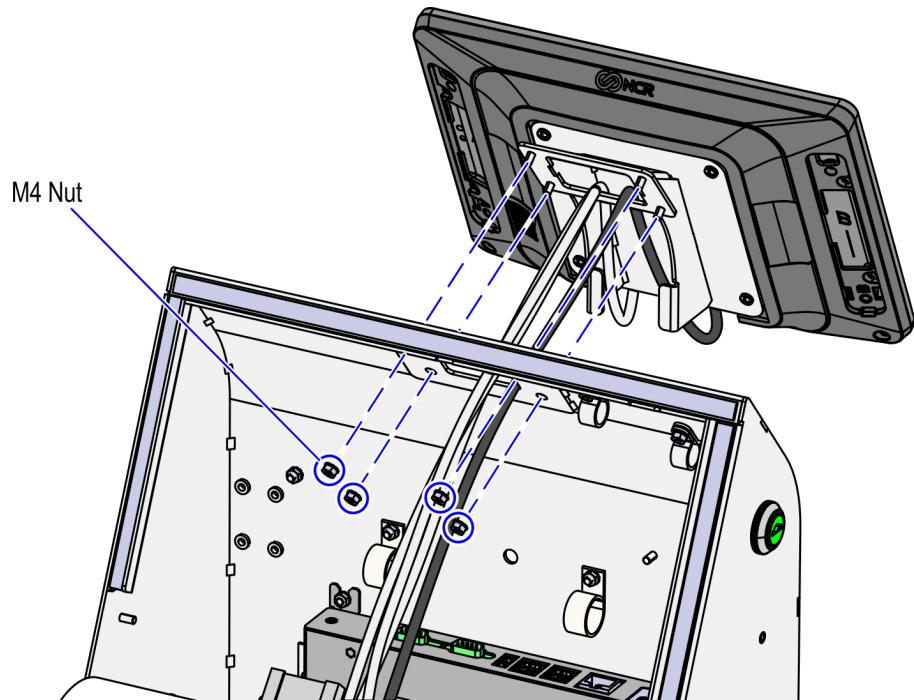


CCP-74470

6. Route the DB9 / USB Split Cable through cable loops and then connect to the Kiosk I/O Board as shown in the image below.

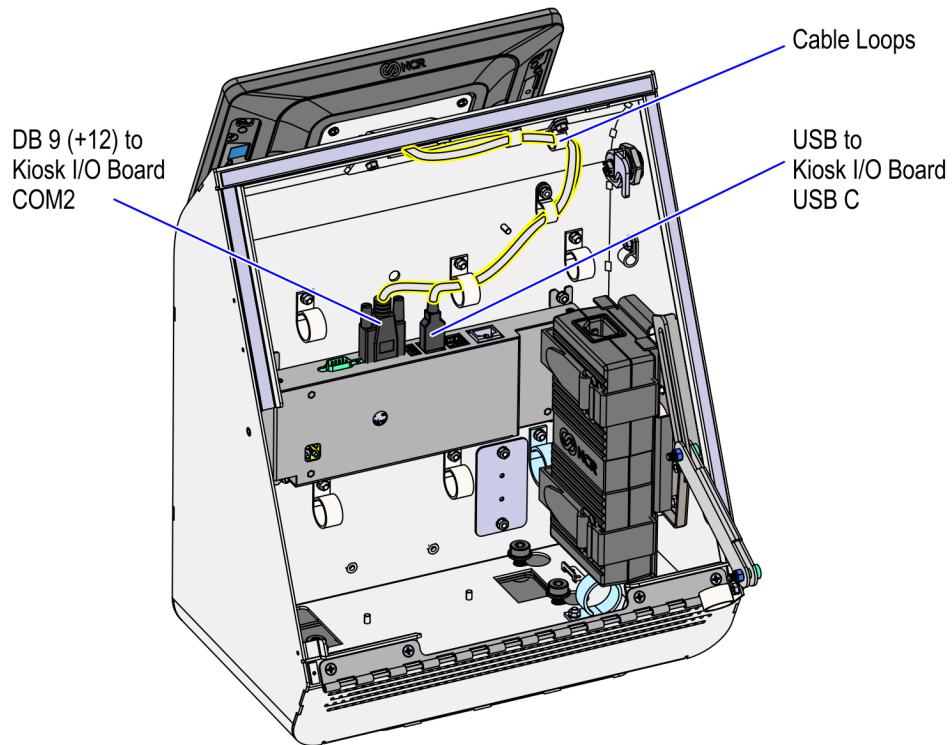

CCP-76603

7. Route the Display Port Cable through cable loops and then connect to the NCR Voyix 7709 Port. Ensure that cables are secured with cable ties as shown in the image below.

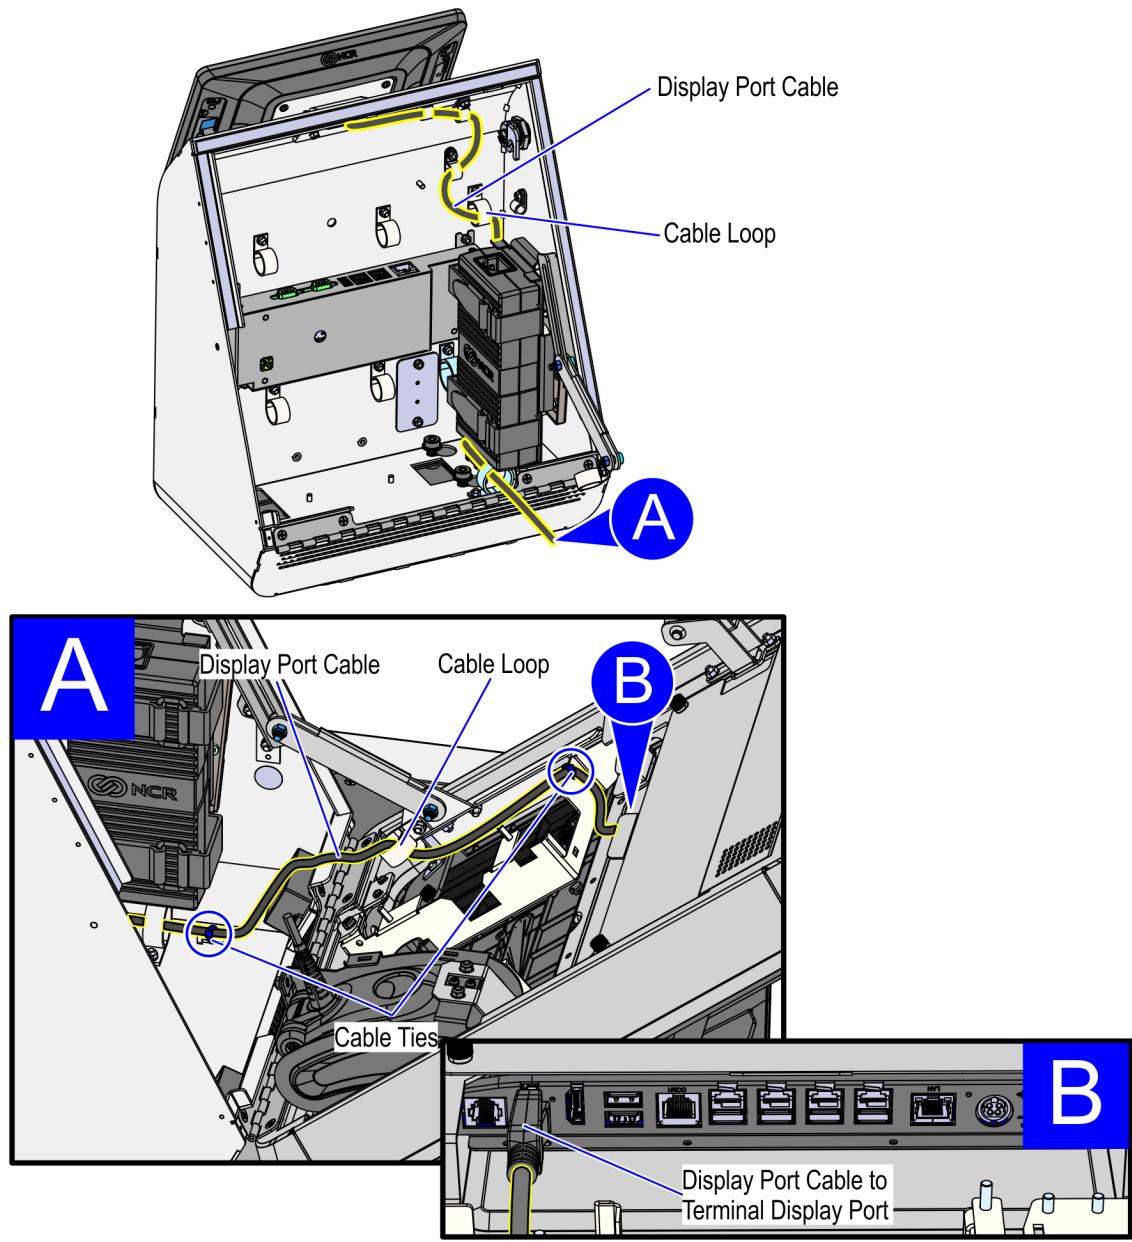

CCP-76604

Confidential and proprietary information of NCR Voyix.

Use and disclose solely pursuant to company instructions.