


# Kit Instructions

## Cylindrical Tri-Light



7360-K064  
Issue A

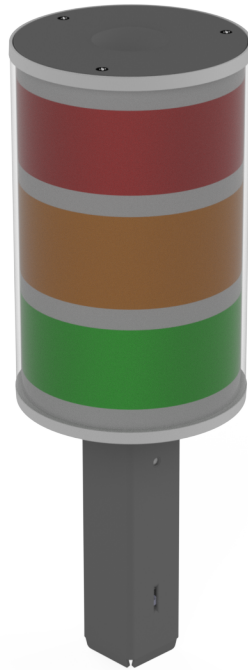

The product described in this document is a licensed product of NCR Corporation.

NCR is a registered trademark of NCR Corporation. NCR FastLane SelfServ™ Checkout is a trademark of NCR Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Where creation of derivative works, modifications or copies of this NCR copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR, NCR's copyright notice must be included.

It is the policy of NCR Corporation (NCR) to improve products as new technology, components, software, and firmware become available. NCR, therefore, reserves the right to change specifications without prior notice.

All features, functions, and operations described herein may not be marketed by NCR in all parts of the world. In some instances, photographs are of equipment prototypes. Software screen images are representative, and in some cases, may not match a customer's installed software exactly. Therefore, before using this document, consult with your NCR representative or NCR office for information that is applicable and current.

Copyright © 2021  
By NCR Corporation  
864 Spring St. NW  
Atlanta, GA 30308  
United States  
All Rights Reserved

---

## Revision Record

Issue	Date	Remarks
A	Nov 2021	First issue.

---

# Cylindrical Tri-Light


---

This publication provides procedures for installing a Cylindrical Tri-Light on an NCR FastLane SelfServ™ Checkout (7360) unit.



**Note:** 7360-K067 Standard Tri-Light/Lane Light Pole with Cable Kit must be ordered with this kit when installing on units that are not configured with Tri-Light/Lane Light device.

## Kit Contents

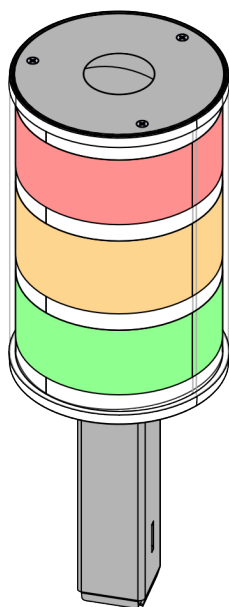

Cylindrical Tri-light  
Assembly, White

CCP-81077

Pat Number	Description
497-0531022	7360-K064 Kit - Cylindrical Tri-Light
497-0527617	Cylindrical Tri-Light Assembly, White
* 497-0423108	Instructions-Kit (Reference Sheet)

\* Items marked with an asterisk are not called out on the image.

# Installation Procedures

To install the Cylindrical Tri-Light, follow these steps:




**Note:** 7360-K067 Standard Tri-Light/Lane Light Pole with Cable Kit must be ordered with this kit when installing on units that are not configured with Tri-Light/Lane Light device.

1. If necessary, do any of the following:
  - Remove the existing Cylindrical Tri-Light. For more information, refer to [Removing the Cylindrical Tri-Light Assembly](#) on the facing page.
  - Remove the existing Tri-Light/Lane Light (R6). For more information, refer to [Removing the Tri-Light/Lane Light \(R6\)](#) on page 5.
  - For units that are not configured with a Tri-Light/Lane Light device, a standard Tri-Light/Lane Light Pole must be installed before installing the Cylindrical Tri-Light. For more information on installing a Tri-Light/Lane Light Pole, refer to *7360-K067 Standard Tri-Light/Lane Light Pole with Cable Kit*.
2. Install the new Cylindrical Tri-Light. For more information, refer to [Installing the Cylindrical Tri-Light Assembly](#) on page 7.


## Removing the Cylindrical Tri-Light Assembly

To remove the Cylindrical Tri-Light assembly, follow these steps:

1. Turn off the NCR SelfServ Checkout software and hardware systems. For more information, refer to "General Operational Procedures" section of *NCR SelfServ™ Checkout (7360) Hardware Service Guide (B005-0000-2378)*.
2. Remove the screw securing the Cylindrical Tri-Light assembly to the Tri-Light/Lane Light pole.

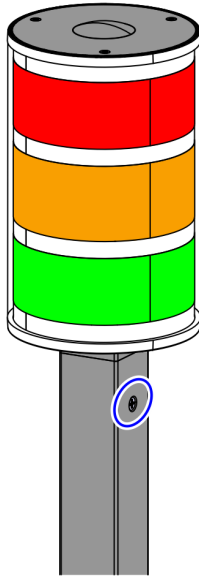


3. Lift the Cylindrical Tri-Light assembly and then disconnect the cables.

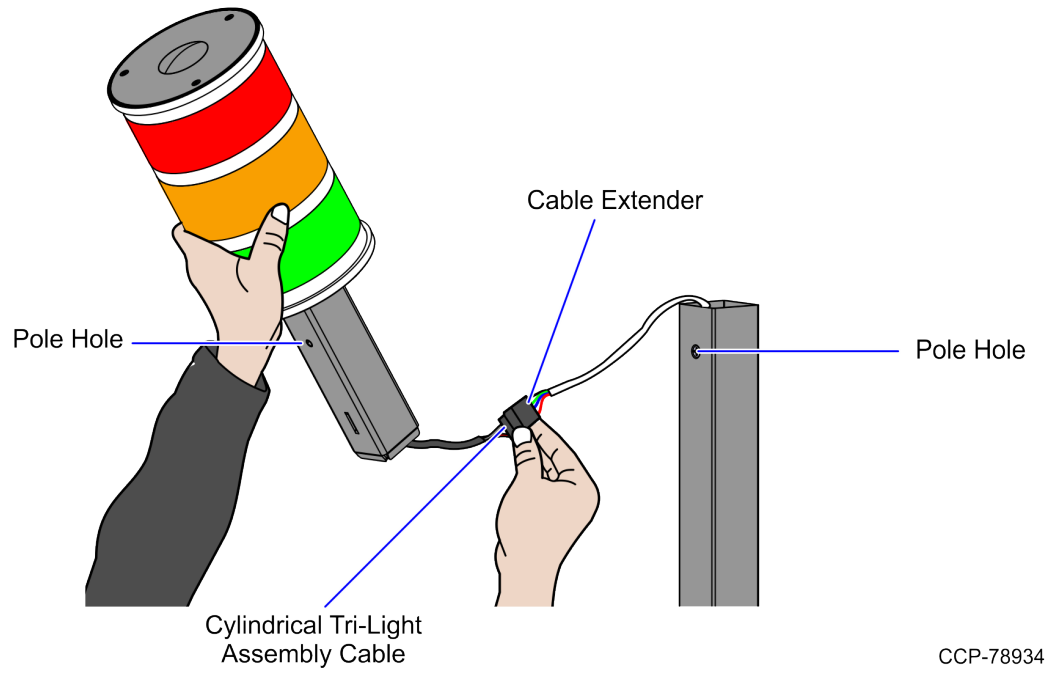

## Removing the Tri-Light/Lane Light (R6)

To remove the Tri-Light/Lane Light assembly, follow these steps:

1. Turn off the NCR SelfServ Checkout software and hardware systems. For more information, refer to "General Operational Procedures" section of *NCR SelfServ™ Checkout (7360) Hardware Service Guide (B005-0000-2378)*.
2. Remove the screw securing the Tri-Light/Lane Light assembly to the Tri-Light/Lane Light pole.

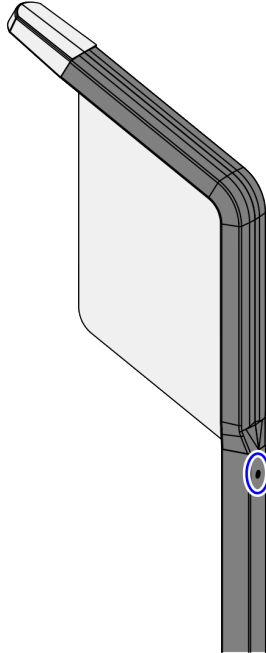




3. Lift the Tri-Light/Lane Light assembly and then disconnect the cables.



**Tip:** Mark all cables as to where they are connected to quickly determine the corresponding port when reconnecting the cables.

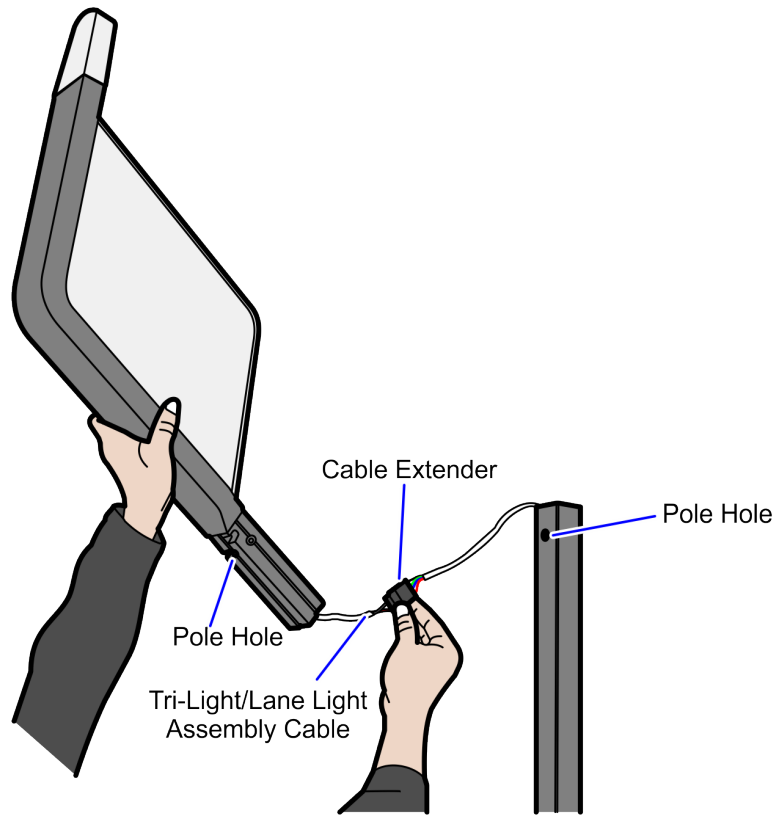


## Installing the Cylindrical Tri-Light Assembly

To install the Cylindrical Tri-Light assembly, follow these steps:

1. Connect the Cylindrical Tri-Light assembly cable with the cable extender in the pole.



**Note:** The Cylindrical Tri-Light assembly cable with either a white or black cable extender.

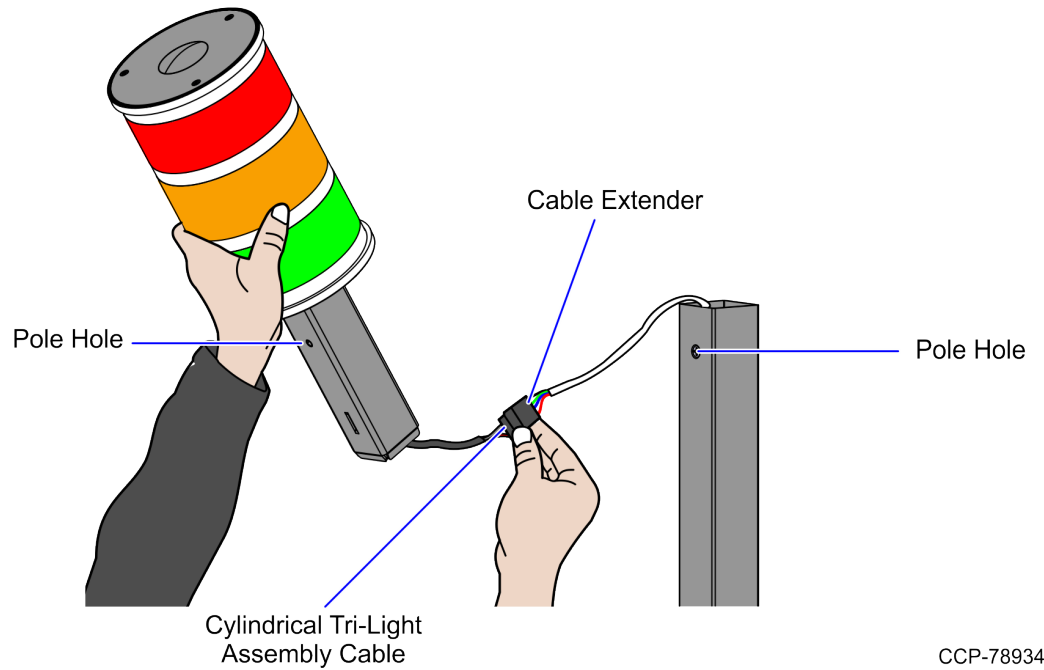


CCP-78934

2. Insert the Cylindrical Tri-Light assembly into the Tri-Light/Lane Light pole. Ensure that the pole holes are aligned.



3. Secure the Cylindrical Tri-Light assembly to the pole with a screw.

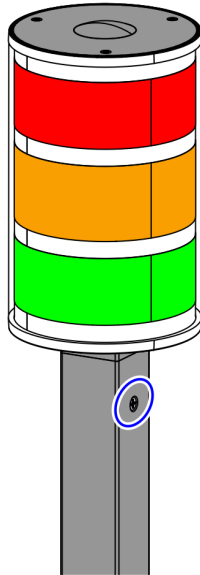

CCP-78933

4. Run the ADD utility to ensure device is updated with the latest firmware.

