


Kit Instructions

Core Cabinet Lower Bumper (Front, Side, Back)

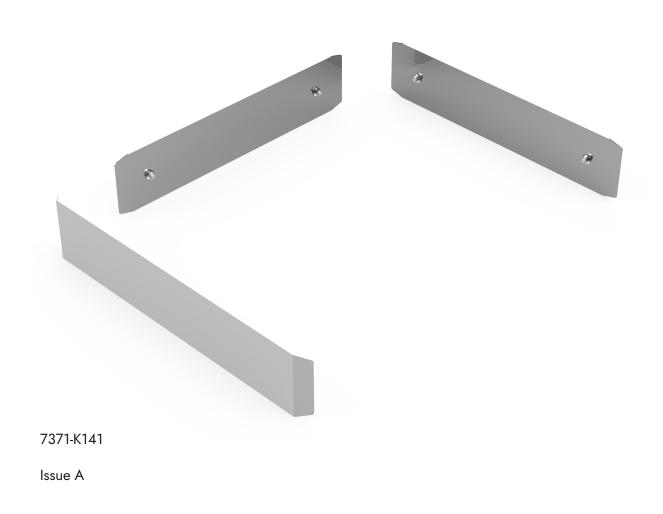

Copyright and Trademark Information

The product described in this document is a licensed product of NCR Voyix Corporation.

NCR Voyix SCO Hardware is a trademark of NCR Voyix Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Where creation of derivative works, modifications or copies of this NCR Voyix copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR Voyix, NCR Voyix's copyright notice must be included.

Disclaimer:

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2025

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

Table of Contents


7371-K141 Core Cabinet Lower Bumper (Front, Side, Back)	
Kit Contents	5
Installation Procedures	6
Installing the Lower Core Cabinet Bumper (Front)	7
Installing the Lower Core Cabinet Bumper (Side) (Left-hand (LH) orientation)	
Installing the Lower Core Cabinet Bumper (Side) (Right-hand (RH) orientation)	14
Installing the Lower Core Cabinet Bumper (Back)	
Opening the Security Door	
Removing the back panel from the Core (Cabinet)	
Installing the back panel to the Core (Cabinet)	24

Revision Record

Issue	Date	Remarks
А	Apr 2025	First issue.

7371-K141 Core Cabinet Lower Bumper (Front, Side, Back)

This publication provides procedures for installing the 7371-K141 Core Cabinet Lower Bumper (Front, Side, Back) to the Bagwell.

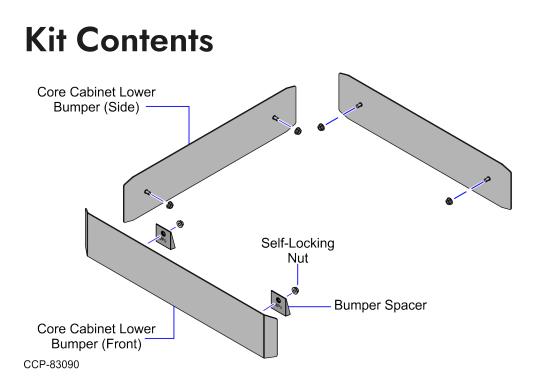

Part Number	Description
497-0534336	Core Cabinet Lower Bumper (Front, Side, Back)
497-0537889	Bumper, Core, Lower, Front
497-0534270	Bumper , Spacer (2 pcs)
006-8627026	Nut - M5 Serrated Flange, Hex (6 pcs)
497-0537891	Bumper, Core, Lower, Side / Back (2 pcs)

* Items marked with an asterisk are not called out on the image.

Installation Procedures


Installing the 7371-K141 Core Cabinet Lower Bumper (Front, Side, Back) involves the following procedures:

- "Installing the Lower Core Cabinet Bumper (Front)" on the next page
- "Installing the Lower Core Cabinet Bumper (Side) (Left-hand (LH) orientation)" on page 10
- "Installing the Lower Core Cabinet Bumper (Side) (Right-hand (RH) orientation)" on page 14
- "Installing the Lower Core Cabinet Bumper (Back)" on page 18

Installing the Lower Core Cabinet Bumper (Front)


To install the Bumper to the lower part of the Cosmetic Door, follow these steps:

1. Unlock and open the Cosmetic Door using a key.

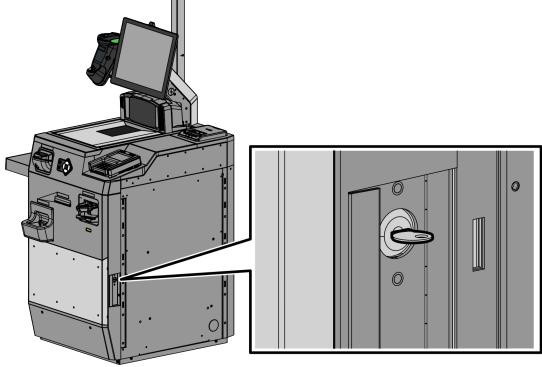


CCP-83094


2. Attach the Bumper Spacers to each Bumper stud.

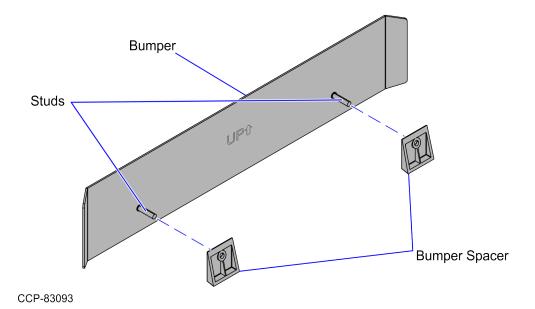

3. Insert the Bumper Studs with Spacers into the corresponding holes on the Cosmetic Door, as shown in the image below.

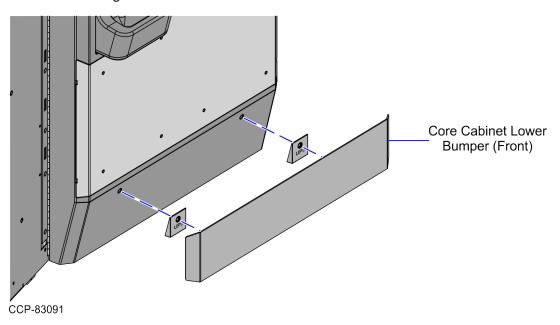


4. Secure the Bumper assembly to the Cosmetic Door using two (2) nuts, as shown in the image below.

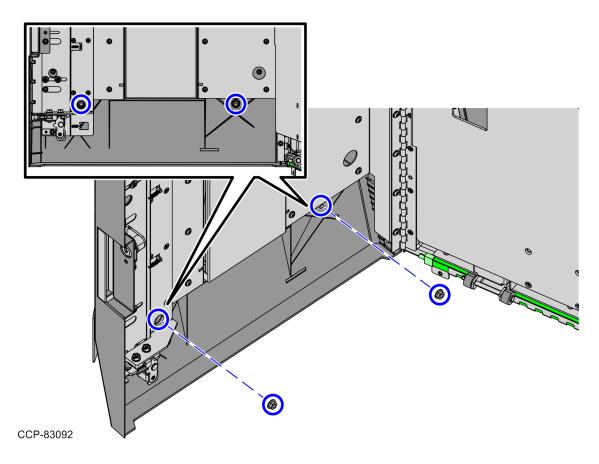

Installing the Lower Core Cabinet Bumper (Side) (Left-hand (LH) orientation)

To install the Bumper to the side of the Core (Cabinet), follow these steps:

1. Unlock and open the Cosmetic Door using a key.

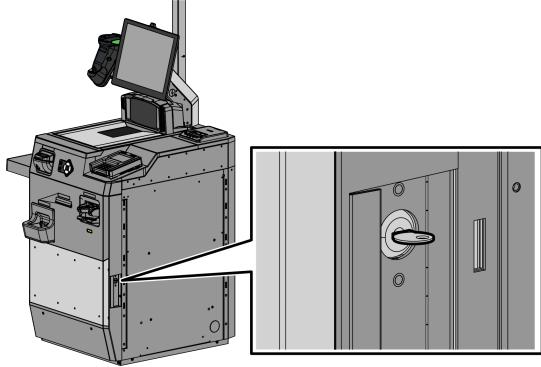

CCP-83094

 If the unit is configured with a Security Door, open the Security Door. For more information, refer to "Opening the Security Door" on page 20.


Ref Note

Open both sides of the Security Door to easily access the nuts that are securing the Side Panels to the Core Frame.

3. For a Left-hand (LH) orientation, rack out the Coin Recycler by pinching the green latch and pulling the Coin Recycler Tray out of the Core (Cabinet).




The image below shows a Self-Checkout unit with SCS Coin Recycler (ITL) only as an example.

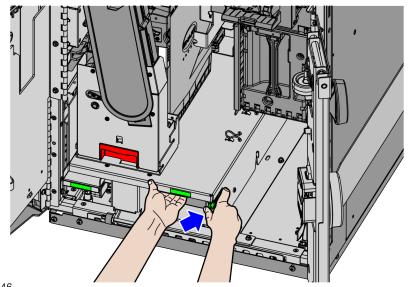


CCP-85046

4. Insert the Bumper Studs into the corresponding holes on the Side Panel, as shown in the image below.

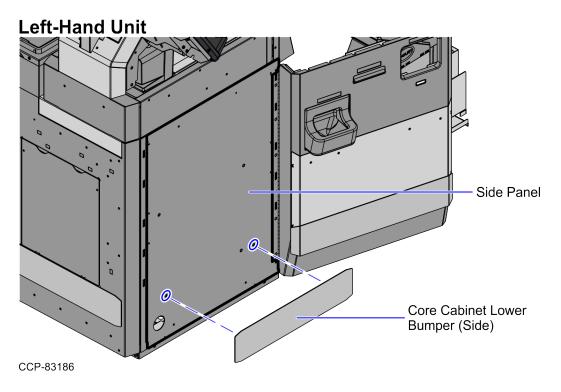


5. From inside the Core (Cabinet), secure the Bumper to the Side Panel using two (2) nuts.

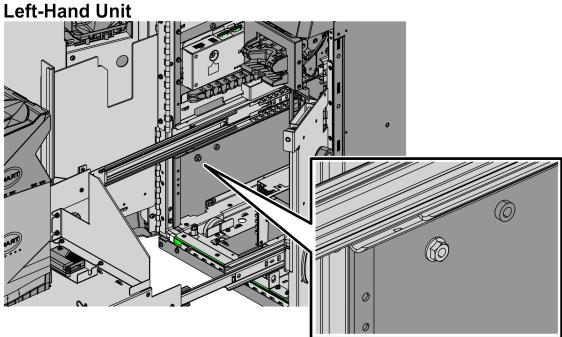

CCP-83188

Tip


The Back Panel can also be removed to easily access the rear nut, as shown in the image below.

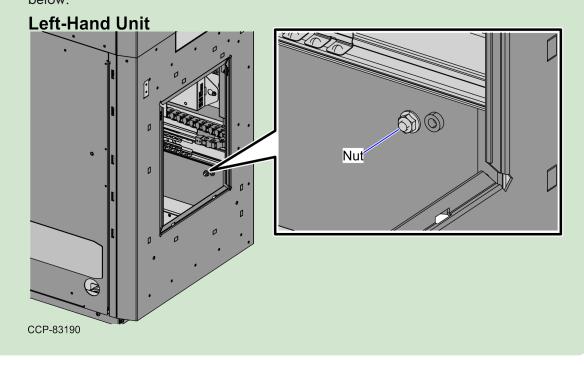

Installing the Lower Core Cabinet Bumper (Side) (Right-hand (RH) orientation)

To install the Bumper to the side of the Core (Cabinet), follow these steps:

1. Unlock and open the Cosmetic Door using a key.

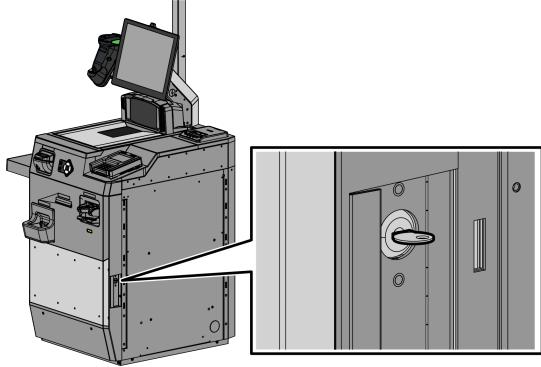


CCP-83094

 If the unit is configured with a Security Door, open the Security Door. For more information, refer to "Opening the Security Door" on page 20.

Ref Note


Open both sides of the Security Door to easily access the nuts that are securing the Side Panels to the Core Frame.

3. For Right-hand (RH) orientation, rack out the Note Recycler by pushing the green latch toward the Top (Main) Module, and pulling the device out of the Core (Cabinet).

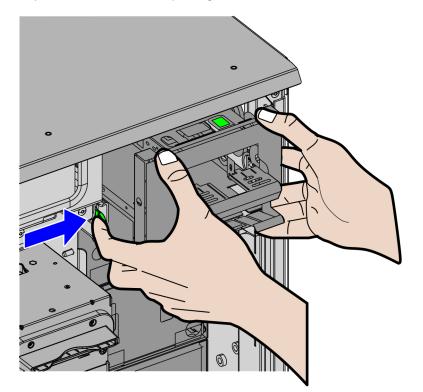


CCP-79608

4. Insert the Bumper Studs into the corresponding holes on the Side Panel, as shown in the image below.

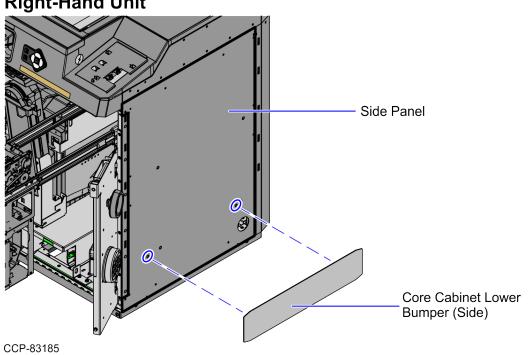


Right-Hand Unit

5. From inside the Core Cabinet Door, secure the Bumper to the Side Panel using two (2) nuts.

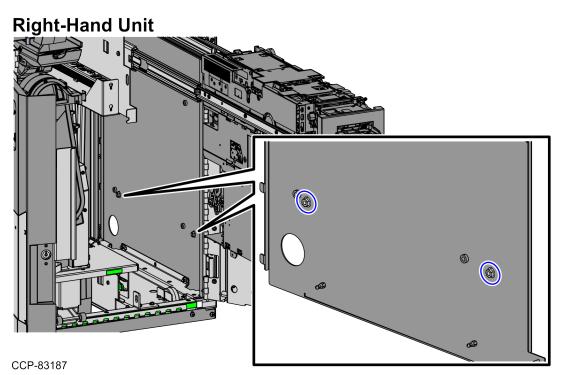

Tip


The Back Panel can also be removed to easily access the rear nut, as shown in the image below.

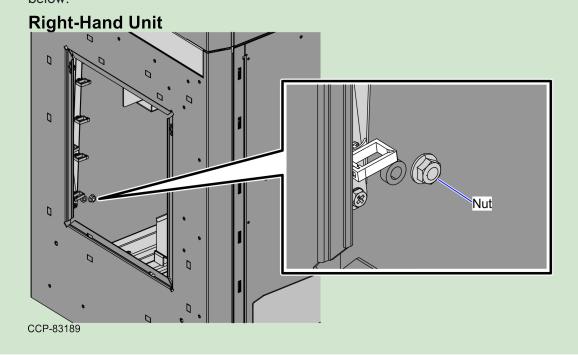


Installing the Lower Core Cabinet Bumper (Back)

To install the Bumper to the back of the Core (Cabinet), follow these steps:

- Remove the Back Panel from the Core (Cabinet). For more information, refer to "<u>Removing the</u> <u>back panel from the Core (Cabinet)</u>" on page 22.
- 2. Insert the Bumper Studs into the corresponding holes on the Core (Cabinet), as shown in the image below.

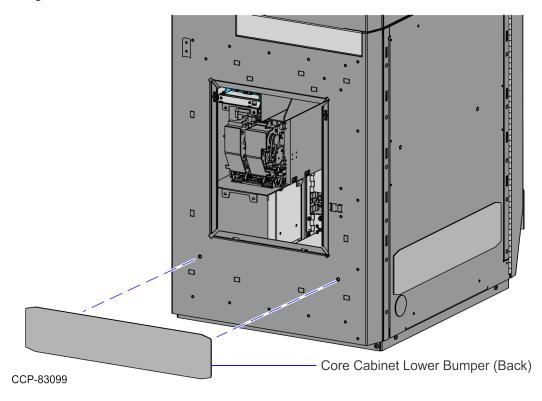

3. Secure the Bumper to the Core (Cabinet) using two (2) nuts.

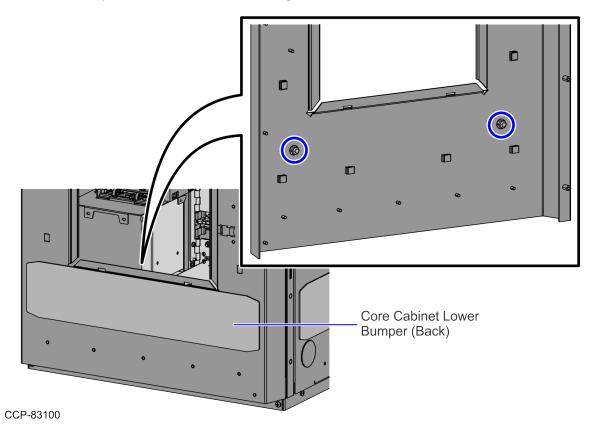

Opening the Security Door

To open the Security Door, follow these steps:

P Note


The Security Door is an option for the Common Product Name unit.

- 1. Do the following:
 - a. Insert the key into the keyhole and then turn the key clockwise.

Caution

Do not force the key into the lock to avoid causing permanent damage to the Lock or Key. Do not apply inward or outward axial force to the Key once it is inserted to avoid causing the Lock from opening incorrectly.


b. Turn the knob counterclockwise.

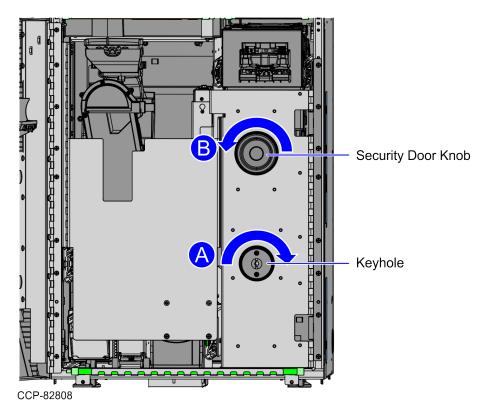

2. Open the Security Door, as show in the image below.

P Note


Open both sides of the Security Door to easily access the nuts that are securing the Side Panels to the Core Frame.

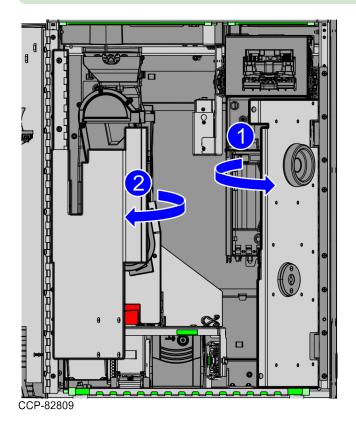


Removing the back panel from the Core (Cabinet)

Removing the back panel from the unit allows access to the interior wall of the core frame where the cables are routed. To remove the back panel, follow these steps:

1. At the top of the back panel, hold the cutout tabs as shown in the image below.

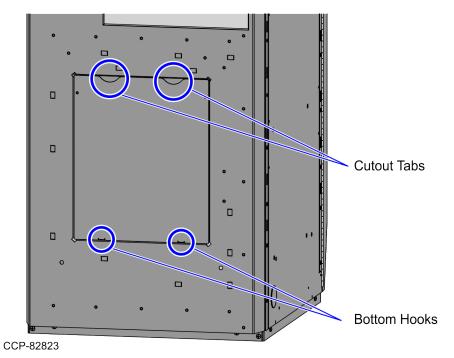

2. Slowly pull the back panel forward to disengage the bottom hooks from the Core Cabinet, as shown in the image below.

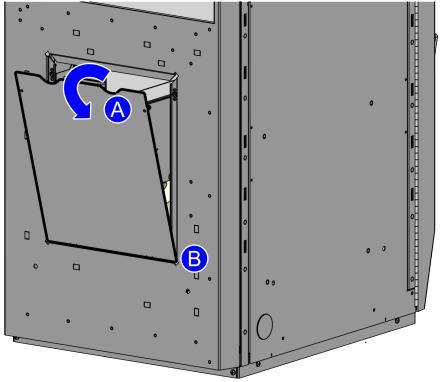

CCP-82824

Installing the back panel to the Core (Cabinet)

To install the back panel to the Core (Cabinet), follow these steps:

- 1. Align and then attach the bottom hooks of the back panel to the flanges on the Core (Cabinet).
- 2. Push to engage the back panel to the Core (Cabinet), as shown in the image below.

