




Kit Instructions

Japan Core Lock (Key Lock)

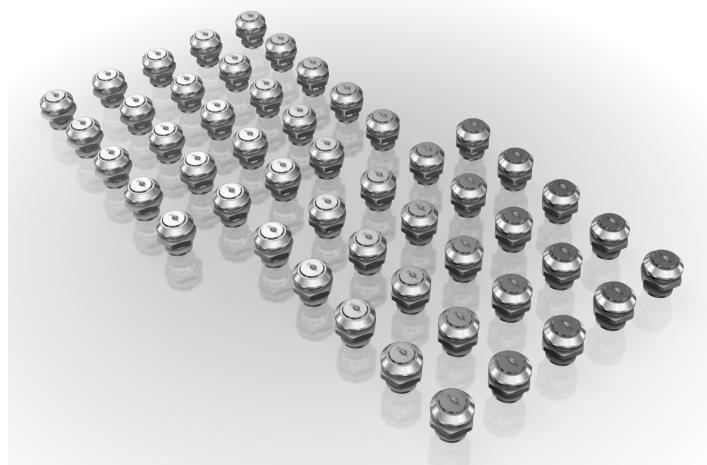

7371-K900

Issue B

Copyright and Trademark Information

The product described in this document is a licensed product of NCR Voyix Corporation.

NCR Voyix FastLane SelfServ™ Checkout is a trademark of NCR Voyix Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Where creation of derivative works, modifications or copies of this NCR Voyix copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR Voyix, NCR Voyix's copyright notice must be included.

Disclaimer:

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2019 - 2026

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

Table of Contents

| | |
|-----------------------------------------|----------|
| Japan Core Lock (Key Lock) | 5 |
| Kit Contents | 5 |
| Installation Procedures | 6 |
| Removing Key Lock | 7 |
| Installing Key Lock | 11 |

Confidential and proprietary information of NCR Voyix.
Use and disclose solely pursuant to company instructions.

Revision Record



| Issue | Date | Remarks |
|-------|----------|------------------------------------------------|
| A | Apr 2019 | First issue. |
| B | Jan 2026 | Updated IP PDF template to NCR Voyix Branding. |

Confidential and proprietary information of NCR Voyix.
Use and disclose solely pursuant to company instructions.

Japan Core Lock (Key Lock)

This publication provides procedures for replacing the Key Lock of the NCR Voyix SelfServ™ Checkout (7707).

Kit Contents

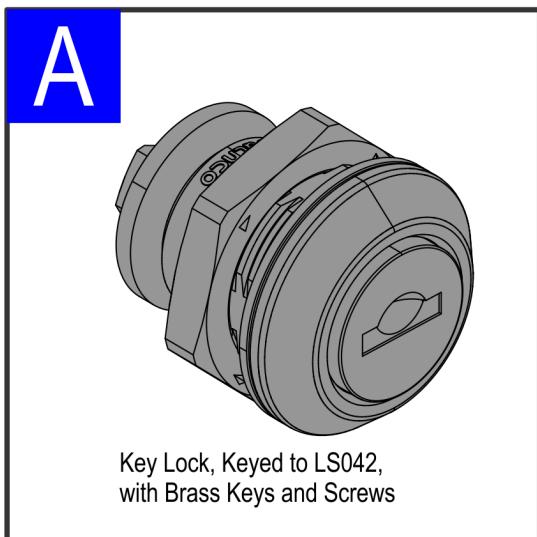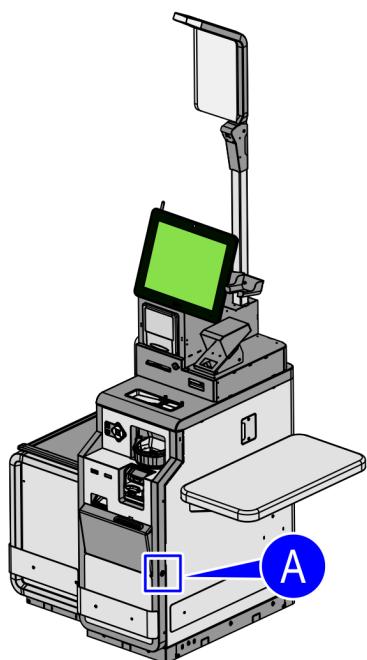

CCP-76176

| Part Number | Description |
|-------------|--------------------------------------------------------------|
| 497-0524934 | 7707-K900 Kit - Japan Lock Core Combination (Key Lock) |
| 006-8627467 | Key Lock, Keyed to LS042, With Brass Keys and Screws, 50 pcs |

* Items marked with an asterisk are not called out on the image.

Installation Procedures


Replacing the Key Lock of the R6-Japan involves the following procedures:

- "[Removing Key Lock](#)" on the next page.
- "[Installing Key Lock](#)" on page 11.

Removing Key Lock

To remove the Key Lock from the NCR Voyix SelfServ™ Checkout (7707) unit, follow these steps:

1. Unlock and open the R6-Japan Cabinet Door, using a key.

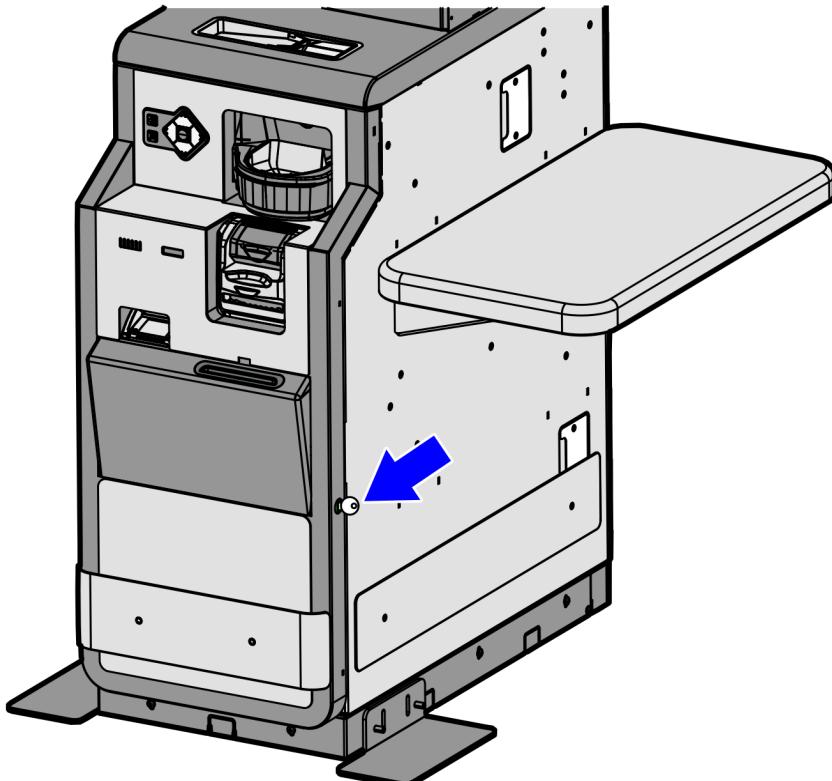


CCP-72794

2. Remove four (4) nuts securing the Key Lock bracket assembly on the door frame, as shown in the image below.

 **Note**

Set aside the screws for installation.

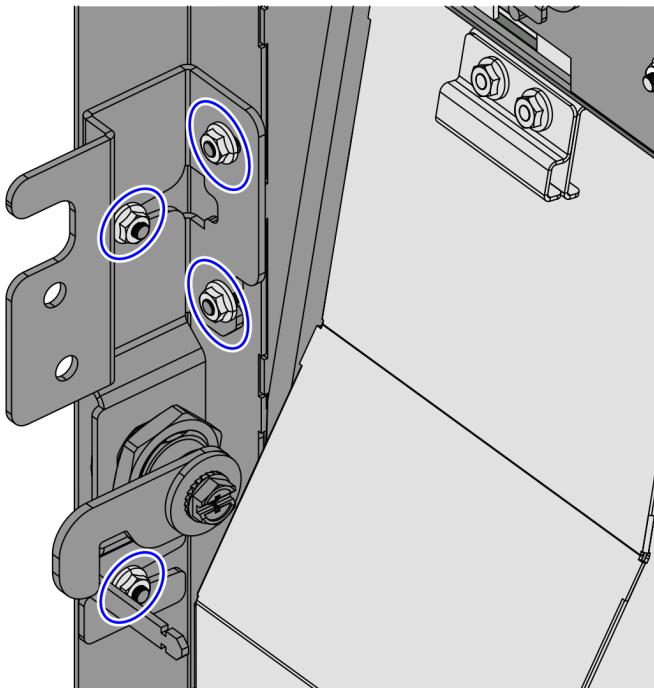


CCP-76193

3. Do the following:

- Remove the washer and bolt securing the pawl to the Key Lock, as shown in the image below.

 **Note**

Set aside the washer, bolt and pawl for installation.

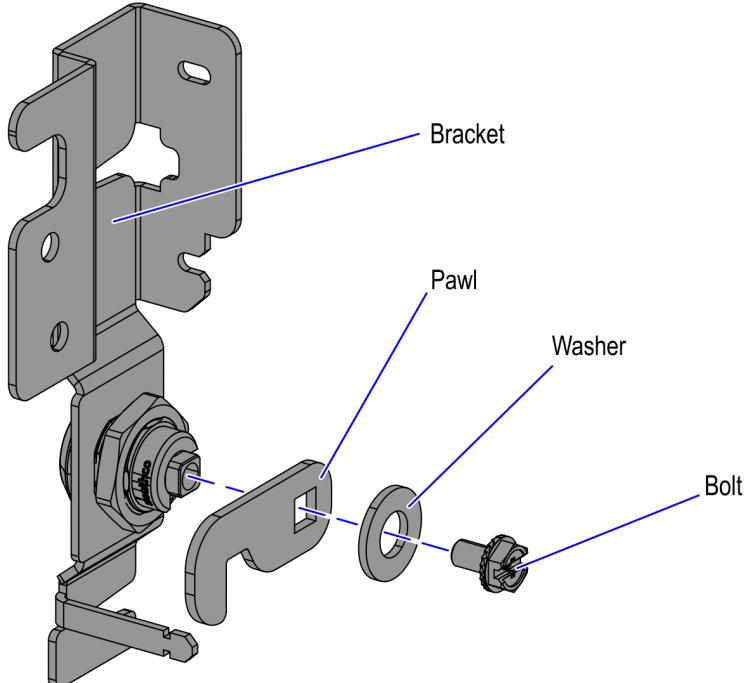


CCP-76195

b. Remove the nut securing the Key Lock to the bracket, as shown in the image below.



Note
Set aside the bracket for installation.

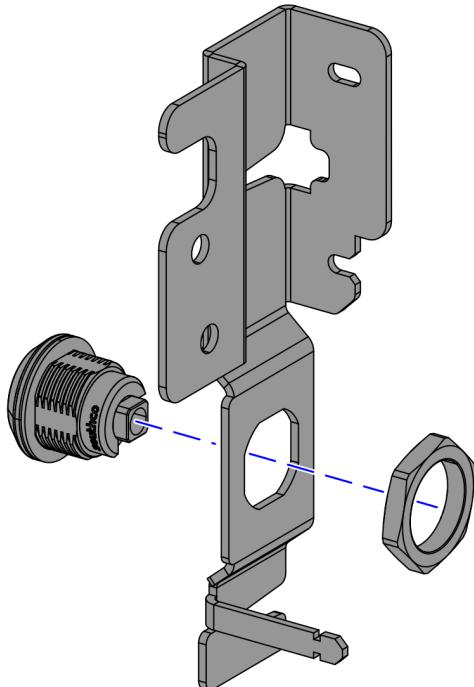


CCP-76194

4. To install a new Key Lock, refer to "[Installing Key Lock](#)" on the next page.

Installing Key Lock

To install a new Key Lock on the NCR Voyix SelfServ™ Checkout (7707) unit involves the following procedures:

1. Remove the existing Key Lock, if necessary. For more information, refer to "[Removing Key Lock](#)" on page 7.
2. Do the following:
 - a. Position the Key Lock to its "Normally Close" position. Ensure that the depressed cavity of the Key Lock is on the right side, as shown in the image below.

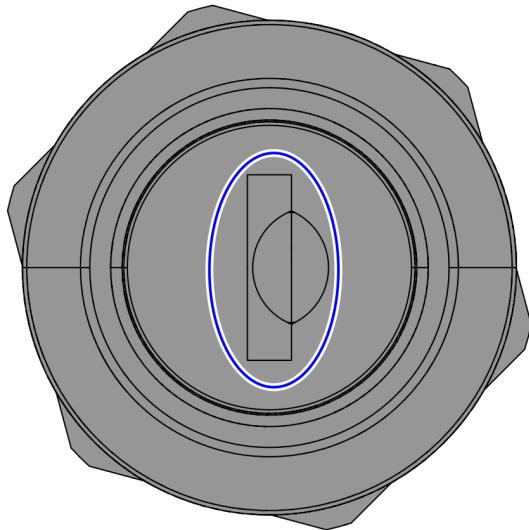


CCP-76198

b. Insert the Key Lock into the bracket and then secure using a nut, as shown in the image below.

 **Note**

Reuse the existing bracket set aside during removal of Key Lock.

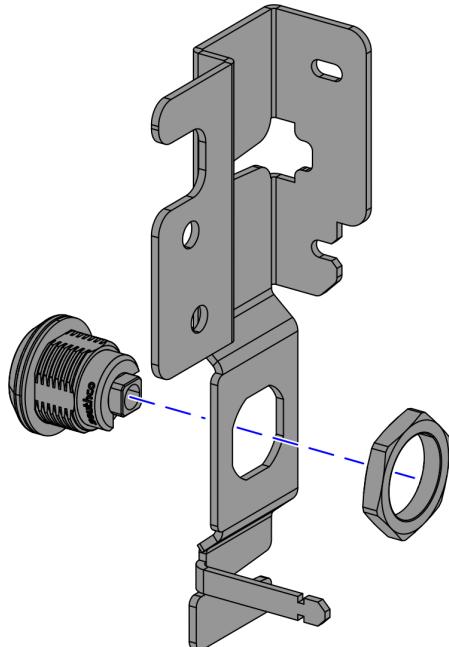


CCP-76194

c. Secure the pawl on the Key Lock using a washer and bolt, as shown in the image below.


Note

Reuse the existing pawl, washer and bolt set aside during removal of Key Lock.

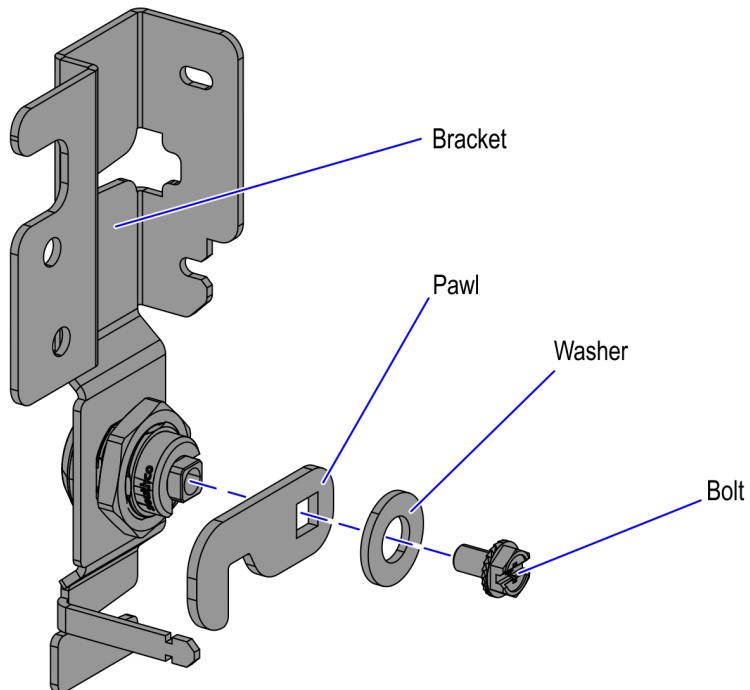

CCP-76195

3. Mount the Key Lock assembly on the mounting hole and then secure using four (4) nuts.
4. Reuse the screws set aside during removal of Key Lock.

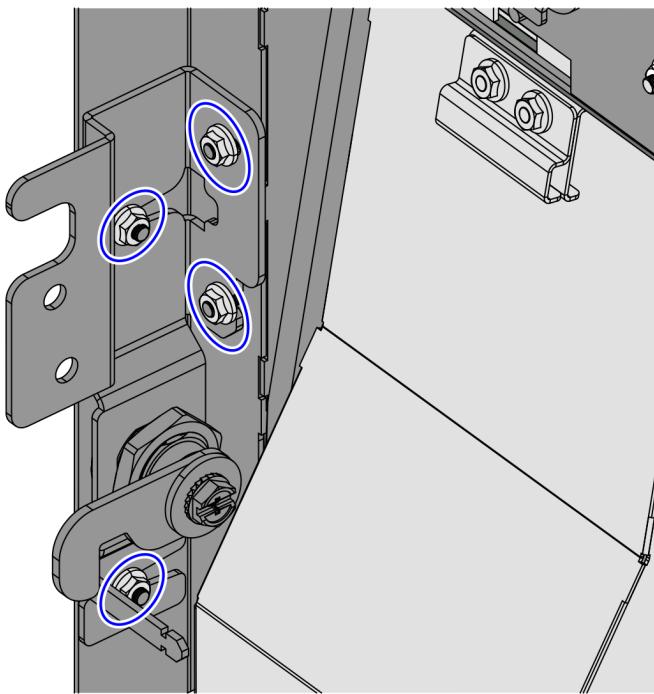

CCP-76193