




# NCR Voyix SelfServ™ 90 (7709)

## Kit Instructions

---

### SS90 MEI Tri-Color and Tri-Light Cable

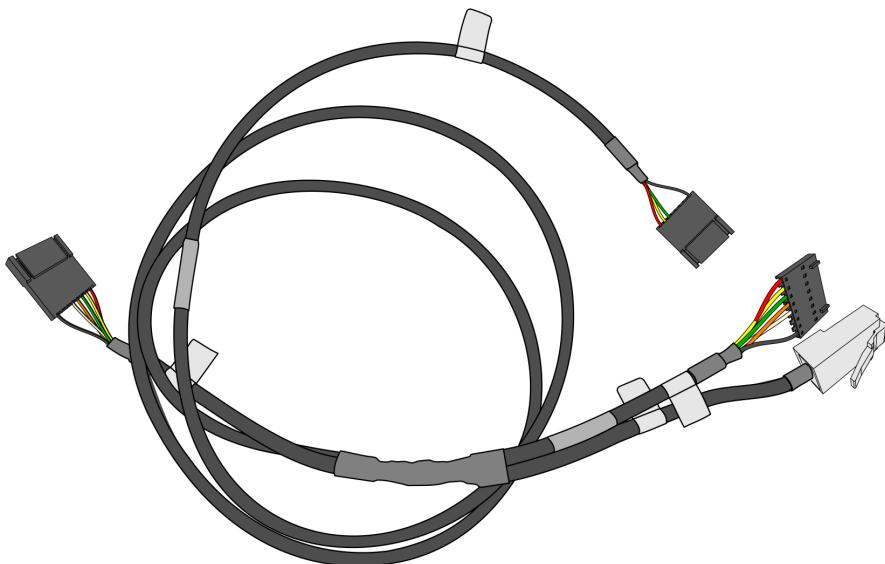

7709-K901

Issue B

# Copyright and Trademark Information

---

The product described in this document is a copyrighted work of NCR Voyix Corporation.

NCR Voyix SelfServ™ 90 (7709) is a trademark of NCR Voyix Corporation.

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2017 – 2026

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

Confidential and proprietary information of NCR Voyix.

Use and disclose solely pursuant to company instructions.

# Table of Contents

---

<b>7709-K901 SS90 MEI Tri-Color and Tri-Light Cable .....</b>	<b>5</b>
Kit Contents .....	5
Installation Procedure .....	6

Confidential and proprietary information of NCR Voyix.  
Use and disclose solely pursuant to company instructions.

# Revision Record

---


Publication issue	Date	Description of change
A	May 2017	First issue.
B	Jan 2026	Updated with NCR Voyix brand.

Confidential and proprietary information of NCR Voyix.  
Use and disclose solely pursuant to company instructions.

# 7709-K901 SS90 MEI Tri-Color and Tri-Light Cable

This publication provides procedures for installing the 7709-K901 SS90 MEI Tri-Color and Tri-Light Cable to the NCR Voyix SelfServ™ 90 (7709).

## Kit Contents

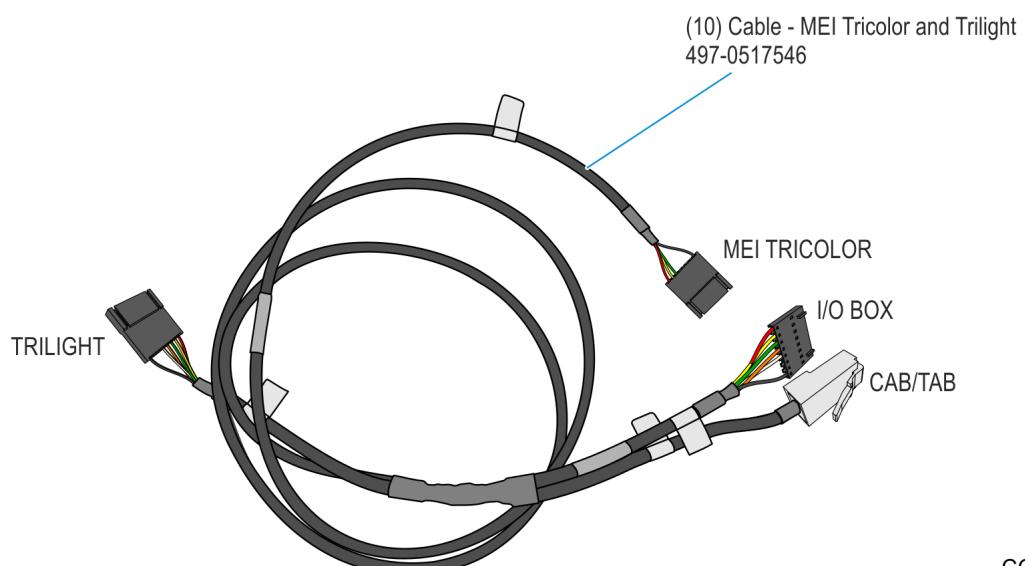

Part Number	Description
497-0517939	7709-K901 SS90 MEI Tri-Color and Tri-Light Cable
497-0517546	Cable - MEI Tricolor And Trilight (10 Pcs)
* 497-0423108	Instructions-Kit (Reference Sheet)


\* Items marked with an asterisk are not called out on the image.

# Installation Procedure

## **⚠ Warning**


Disconnect the AC power cord before disassembling the Terminal.

1. Access the I/O Box in the rear side of the Kiosk Pedestal and disconnect the R6 Tri-Light extension cable from the I/O Box port, TRILIGHT/LANELIGHT.

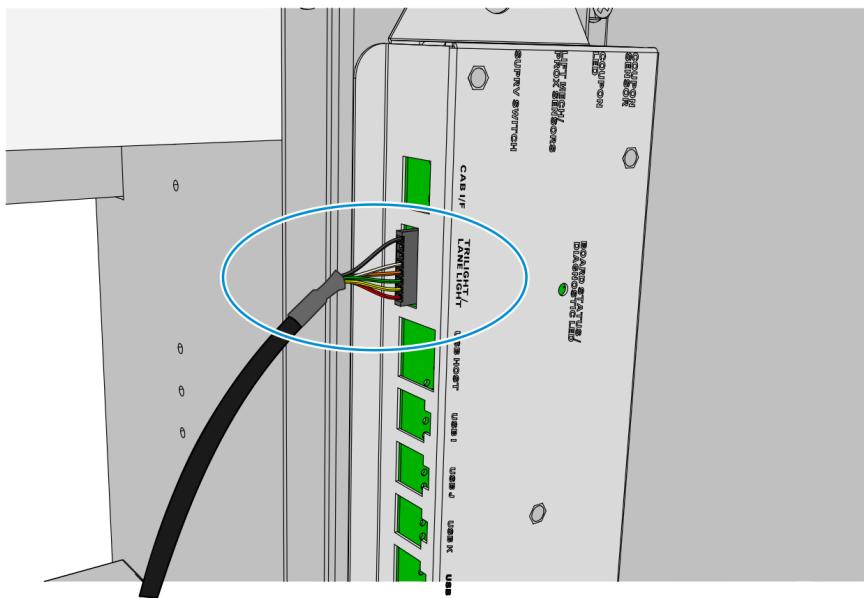


CCP-71628

2. Connect the MEI Tricolor and Trilight cable to the I/O Box.
  - Connect the CAB/TAB connector to the CAB I/F port.
  - Connect the I/O BOX connector to the TRILIGHT/LANELIGHT port.

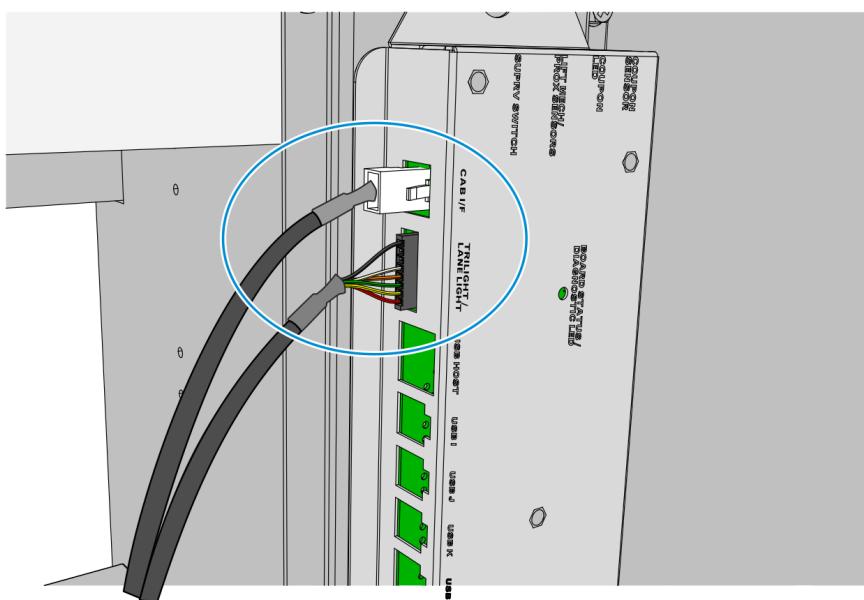


CCP-71629

3. Connect the TRILIGHT connector of the MEI Tricolor and Trilight cable to the R6 Tri-Light extension cable.

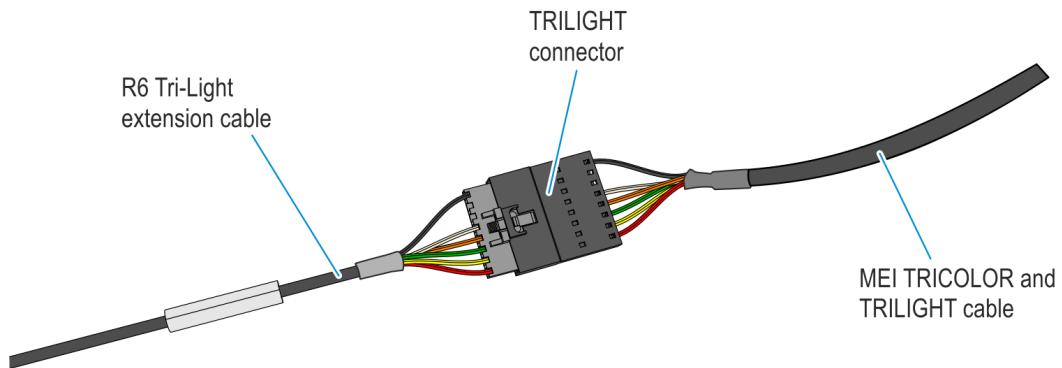


CCP-71631

4. From inside the SS90 Cabinet, route the SS90 Tri-Color LED cable down into the pedestal through the left-hand access hole.

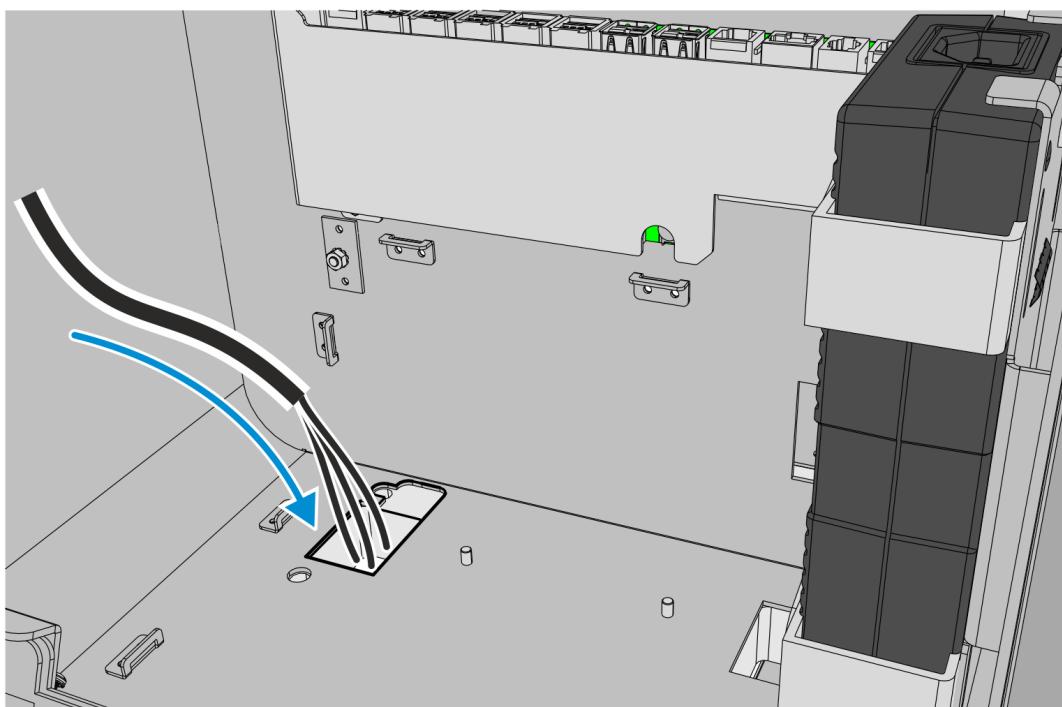


CCP-71633

5. Connect the SS90 Tri-Color LED cable to the MEI TRICOLOR connector of the MEI Tricolor and Trilight cable.

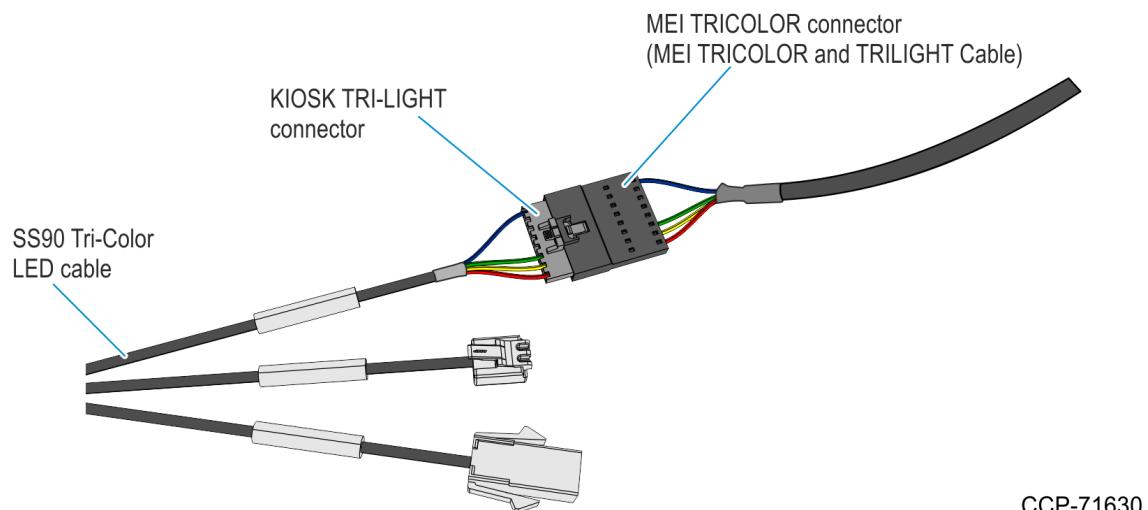

CCP-71630

6. Bundle and secure the excess cable length inside the pedestal.

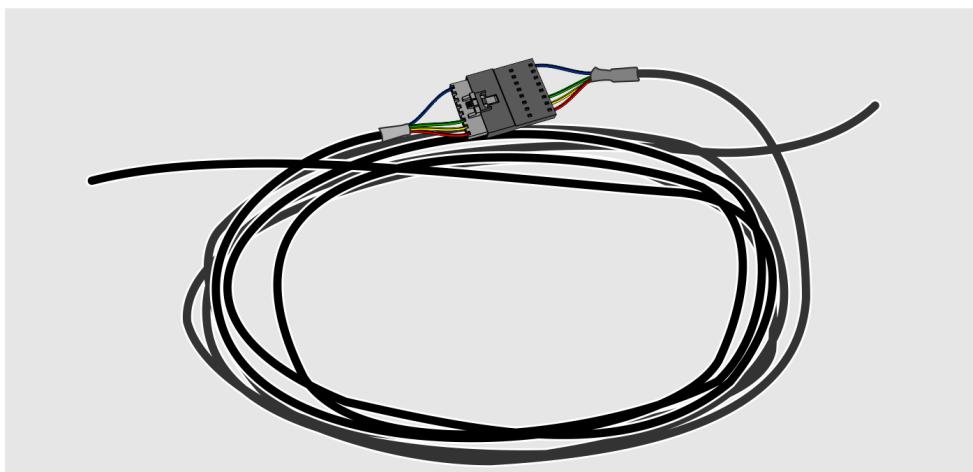

CCP-71632