Kit Instructions

128GB M.2 SSD

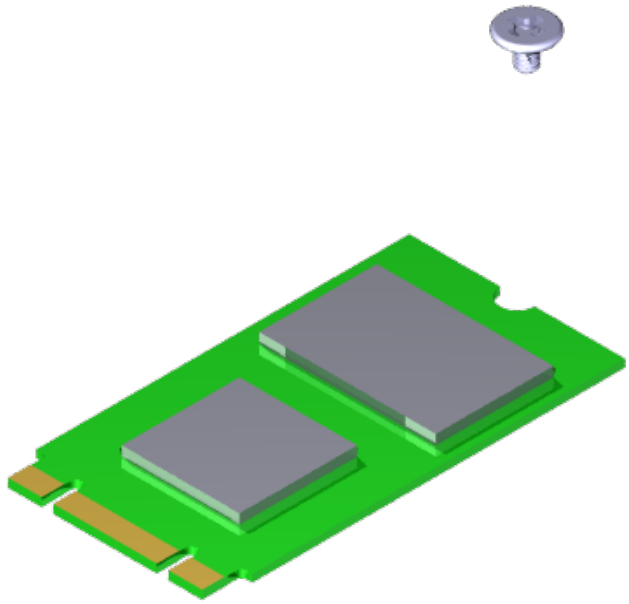

7703-K241
Issue A

The product described in this book is a licensed product of NCR Corporation.

NCR is a registered trademark of NCR Corporation. NCR RealPOS is a trademark of NCR Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

Where creation of derivative works, modifications or copies of this NCR copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR, NCR's copyright notice must be included.

It is the policy of NCR Corporation (NCR) to improve products as new technology, components, software, and firmware become available. NCR, therefore, reserves the right to change specifications without prior notice.

All features, functions, and operations described herein may not be marketed by NCR in all parts of the world. In some instances, photographs are of equipment prototypes. Therefore, before using this document, consult with your NCR representative or NCR office for information that is applicable and current.

To maintain the quality of our publications, we need your comments on the accuracy, clarity, organization, and value of this book. Please use the link below to send your comments.

EMail: FD230036@ncr.com

Copyright © 2019
By NCR Corporation
Global Headquarters
864 Spring St NW
Atlanta, GA 30308
U.S.A.
All Rights Reserved

Revision Record

Issue	Date	Remarks
A	Mar 2019	First Issue

128GB M.2 SSD

This kit provides a 128GB M.2 SSD for the NCR XR7 Plus POS.

Kit Contents

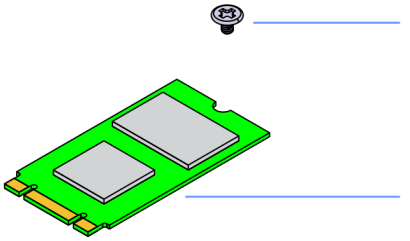

Screw, M2x3mm, Round Head, Phillips Drive, Steel, Black/CR3
497-0517780

128GB M.2 Apacer SSD, 42mm
006-8626248

CCP-75495

Installation Procedure

1. Lay the terminal face down on a flat surface.

Caution: Always use a soft material (cloth, foam) to protect the display screen when placing the terminal face down.

2. Remove the Base Stand and Rear Cover assembly.
   a. Loosen the captive screws (2) that secure the Rear Cover to the chassis.
   b. Pivot the assembly as shown to remove it.

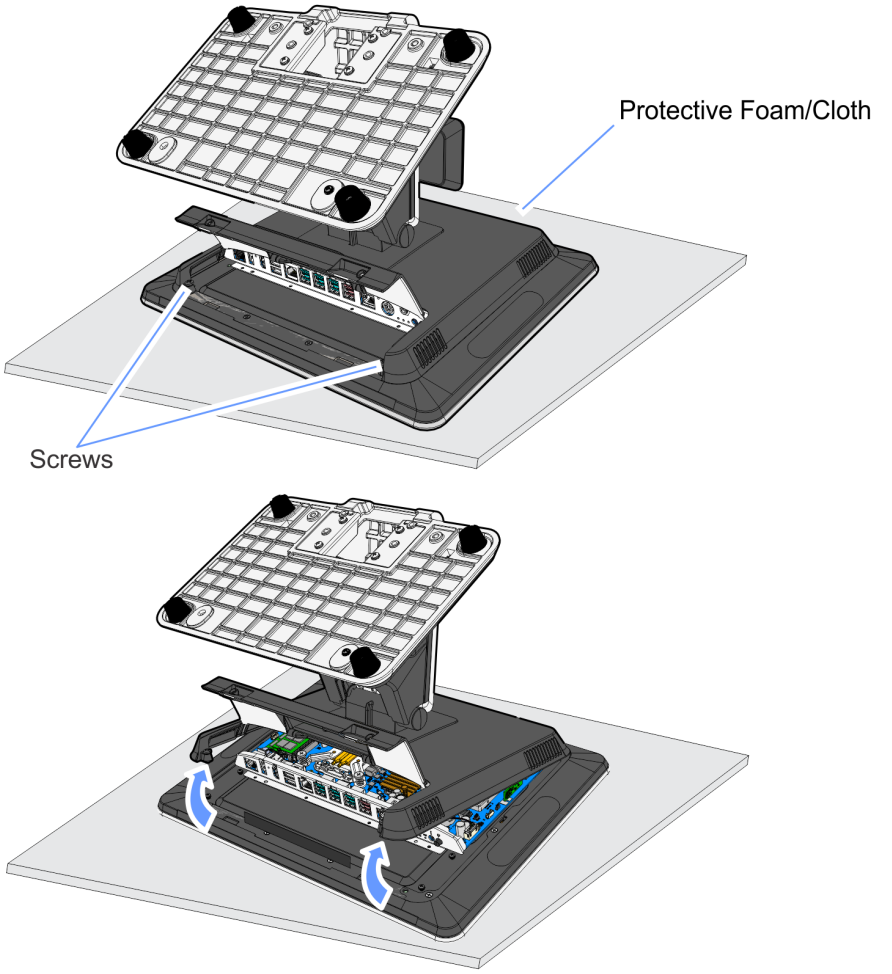

3. Slide the M.2 SSD into an available connector on the Motherboard.

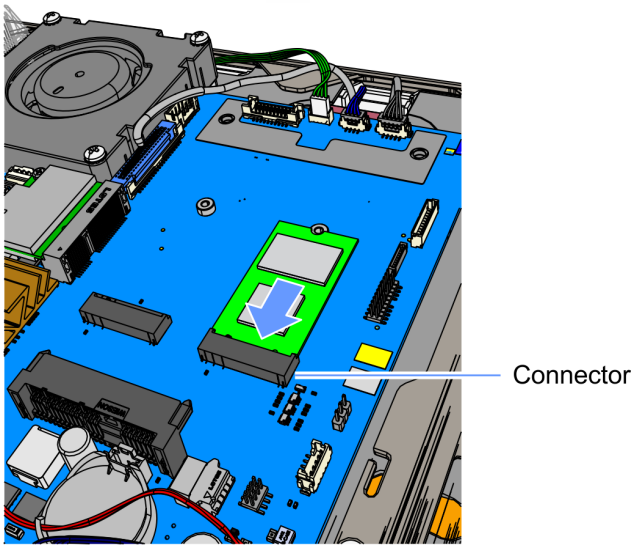

CCP-75493

4. Secure the M.2 SSD to the Motherboard with the M2x3mm screw provided in the kit.

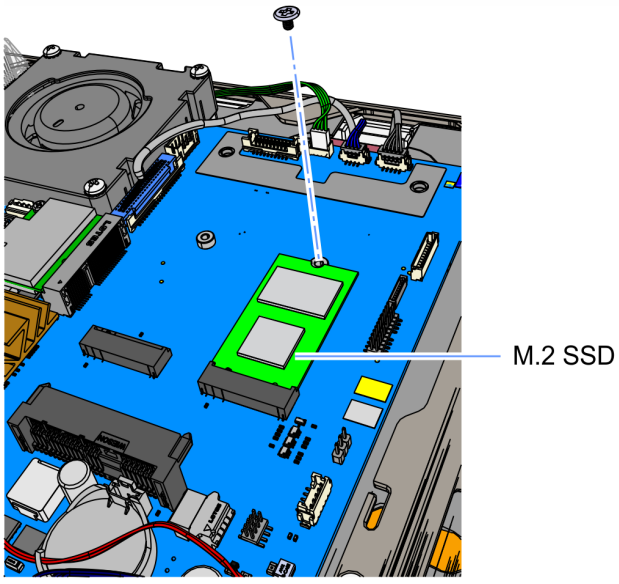

CCP-75494

5. Replace the Base Stand and Rear Cover assembly on the terminal.