




CX Power Supply

Kit Instructions

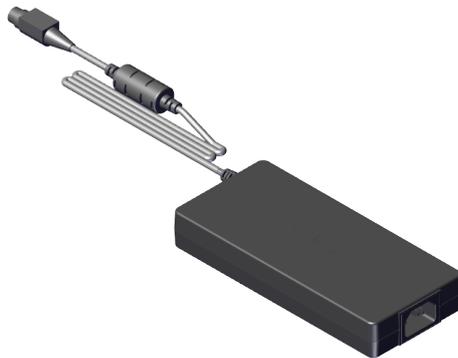

7772-K120

Issue A

Copyright

The product described in this document is a licensed product of NCR Voyix Corporation.

NCR Voyix CX7 All-in-One POS (7772) is a trademark of NCR Voyix Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Where creation of derivative works, modifications or copies of this NCR Voyix copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR Voyix, NCR Voyix's copyright notice must be included.

It is the policy of NCR Voyix Corporation to improve products as new technology, components, software, and firmware become available. NCR Voyix, therefore, reserves the right to change specifications without prior notice.

All features, functions, and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes. Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

Copyright © 2026
By NCR Voyix Corporation
Atlanta, Georgia, USA
All Rights Reserved

Table of Contents

CX Power Supply **5**

Kit Contents 5

Installation Procedure 6


Revision Record

Issue	Date	Remarks
A	Feb 2026	First Issue

CX Power Supply

This kit provides a Power Supply for the NCR Voyix CX7 All-in-One POS (7772) or NCR Voyix CX5 All-in-One POS (7773).

Kit Contents

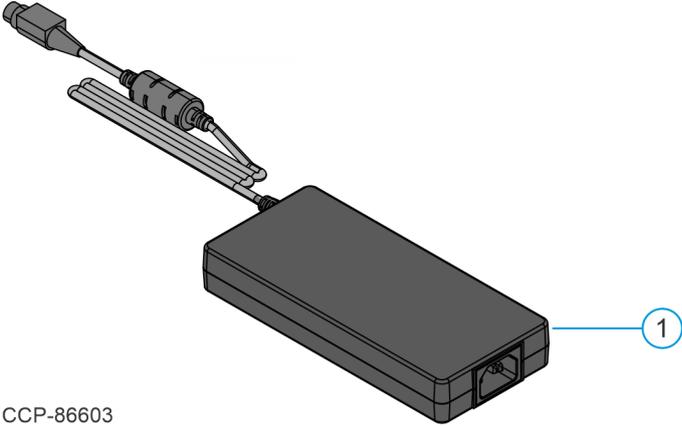

CCP-86603

Item	Part Number	Description
	497-0528341	Kit—CX Power Supply
1	497-0524379	Power Supply, 150W 24V, 4 Pin DC, 1.5m Cord Length

Installation Procedure

⚠ Caution


Do not connect or disconnect the Power Cable from the terminal with the AC Power Cord connected to an AC outlet. It is recommended to disconnect the AC Power Cord from the AC outlet and wait 30 seconds before connecting or disconnecting the Power Supply cable from the terminal.

1. Connect the Power Supply Cable to the Power In connector on the Base. Ensure the flat side of the Power Supply Cable connector is on the bottom.


⚠ Warning

Connecting the Power Supply Cable connector in an incorrect position can damage the POS.

USB CENTRIC I/O (RETAIL)

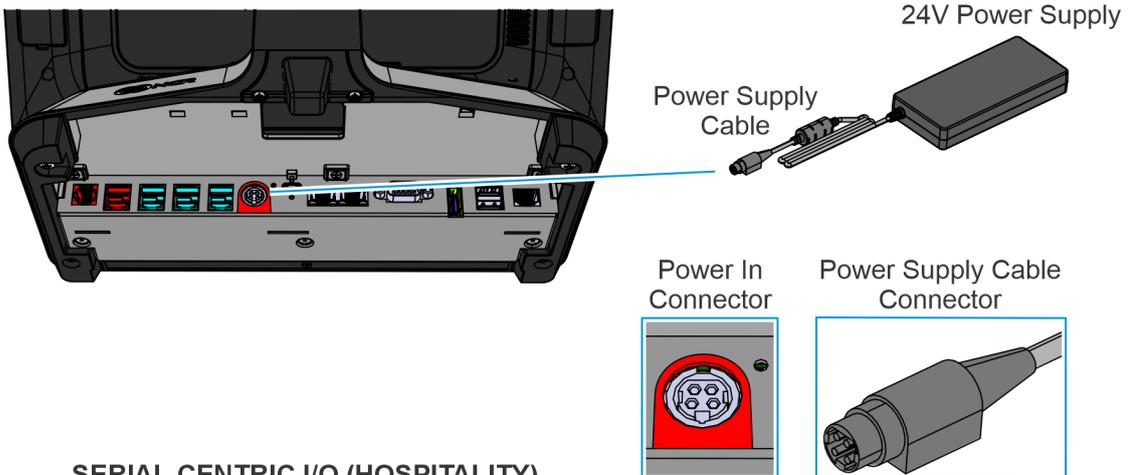


SERIAL CENTRIC I/O (HOSPITALITY)

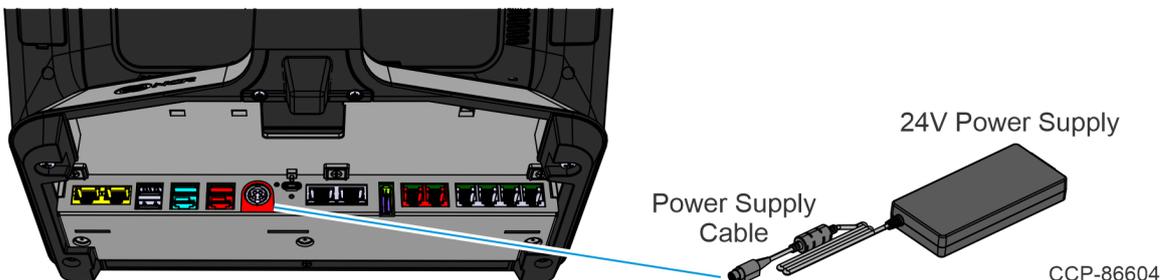

2. Connect the AC Power Cord to the Power Supply and to an AC outlet.

USB CENTRIC I/O (RETAIL)

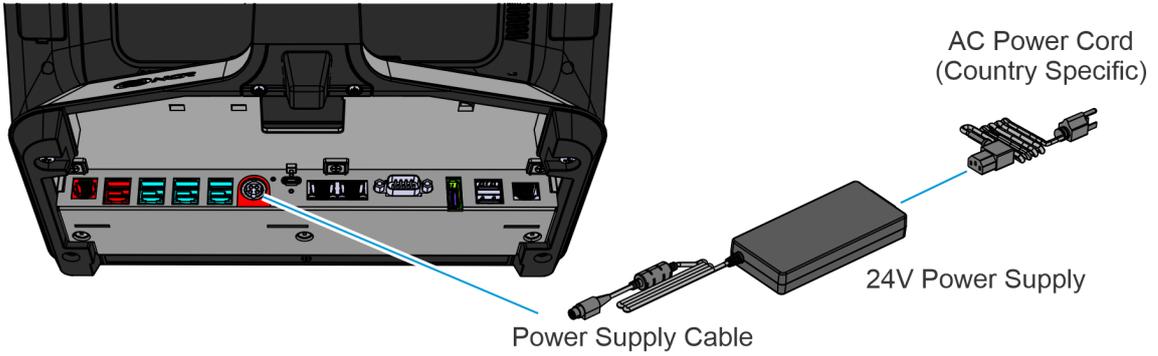

SERIAL CENTRIC I/O (HOSPITALITY)

