



# NCR Voyix FastLane SelfServ™ (7362) Cash Tender Module

## Kit Instructions

---

### R6 CTM Custom Top Cover

7362-K087

Issue B

# Copyright and Trademark Information

---

The product described in this document is a copyrighted work of NCR Voyix Corporation.

NCR Voyix FastLane SelfServ™ Checkout is a trademark of NCR Voyix Corporation.

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2018 - 2026

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

# Table of Contents

---

<b>7362-K087 R6 CTM Custom Top Cover .....</b>	<b>5</b>
Kit Contents .....	5
Installation Procedure .....	6
Removing the Top Cover .....	7
Installing R6 CTM Custom Top Cover .....	10

# Revision Record

---


Publication issue	Date	Description of change
A	May 2018	First issue.
B	Feb 2026	Updated with NCR Voyix brand.

# 7362-K087 R6 CTM Custom Top Cover

This publication provides procedures for replacing the top cover with an R6 CTM Custom Top Cover on the NCR Voyix FastLane SelfServ™ (7362) Cash Tender Module unit.

## Kit Contents

The R6 CTM Custom Top Cover Installation Kit contains the following:

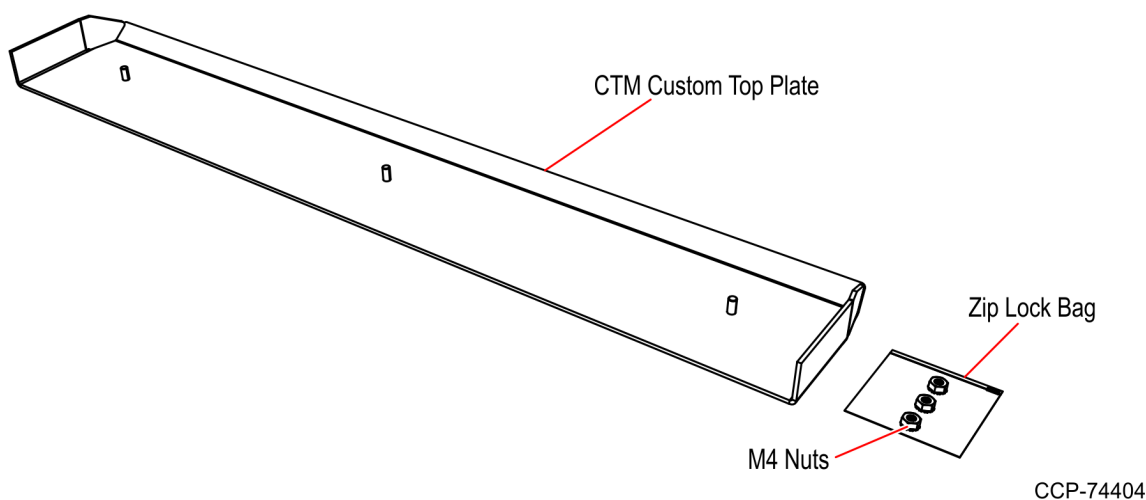

Part Number	Description
497-0522013	7362-K087 R6 CTM Custom Top Cover
497-0521731	CTM Custom Top Cover
006-8611847	M4 Nut
006-8623359	Zip Lock Bag (2x2)
* 497-0423108	Instructions-Kit (Reference Sheet)

\* Items marked with an asterisk are not called out on the image.

# Installation Procedure

Installing the R6 CTM Custom Top Cover on the NCR Voyix FastLane SelfServ™ (7362) Cash Tender Module unit requires an M4 Nut Driver with torque limiter and involves the following procedures:

1. "[Removing the Top Cover](#)" on the next page.
2. "[Installing R6 CTM Custom Top Cover](#)" on page 10.




## Note

Use magnetic screwdrivers to easily handle screws.

# Removing the Top Cover

To remove the top cover, follow these steps:


1. Using the door key, unlock and then open the NCR Voyix FastLane SelfServ™ (7362) Cash Tender Module Core Door.

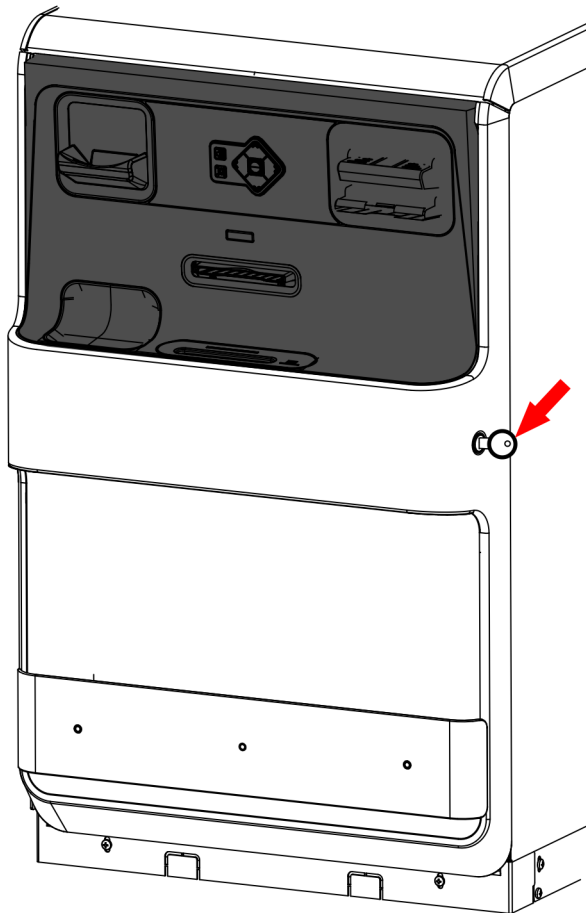

CCP-70906

2. Depending on the type of security lock, unlock and then open the Security Door.


3. Push the green latch toward the Top (Main) Module, and then rack out the Note Recycler out of the cabinet.

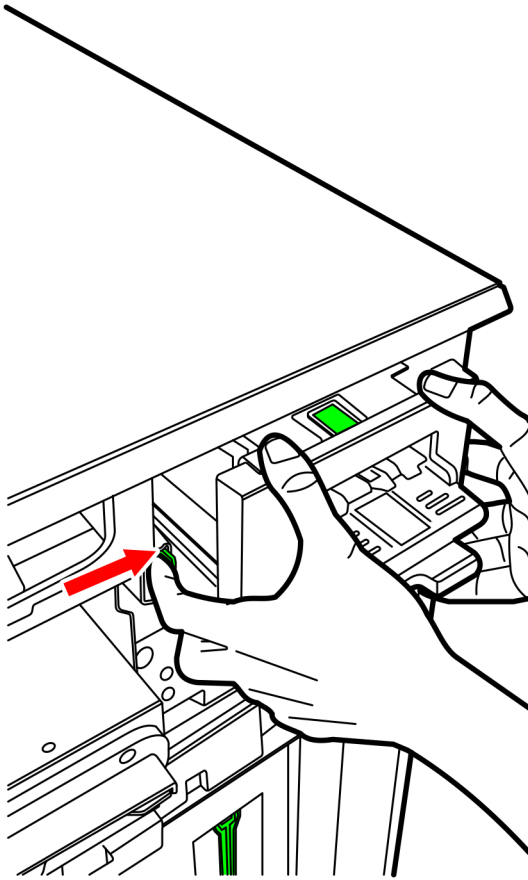


CCP-74405



4. Remove three M4 Nuts securing the top cover to the main assembly. Use an M4 Nut Driver as shown in the image below.

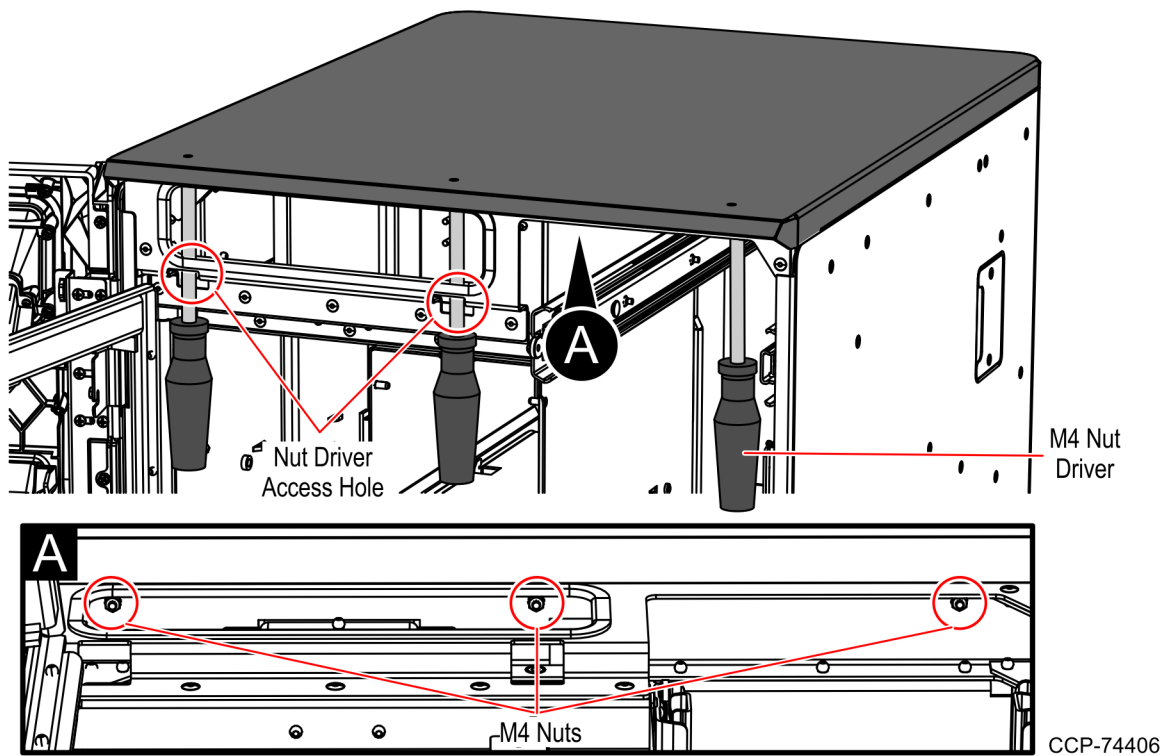

5. Lift up the Top Cover from the main module.

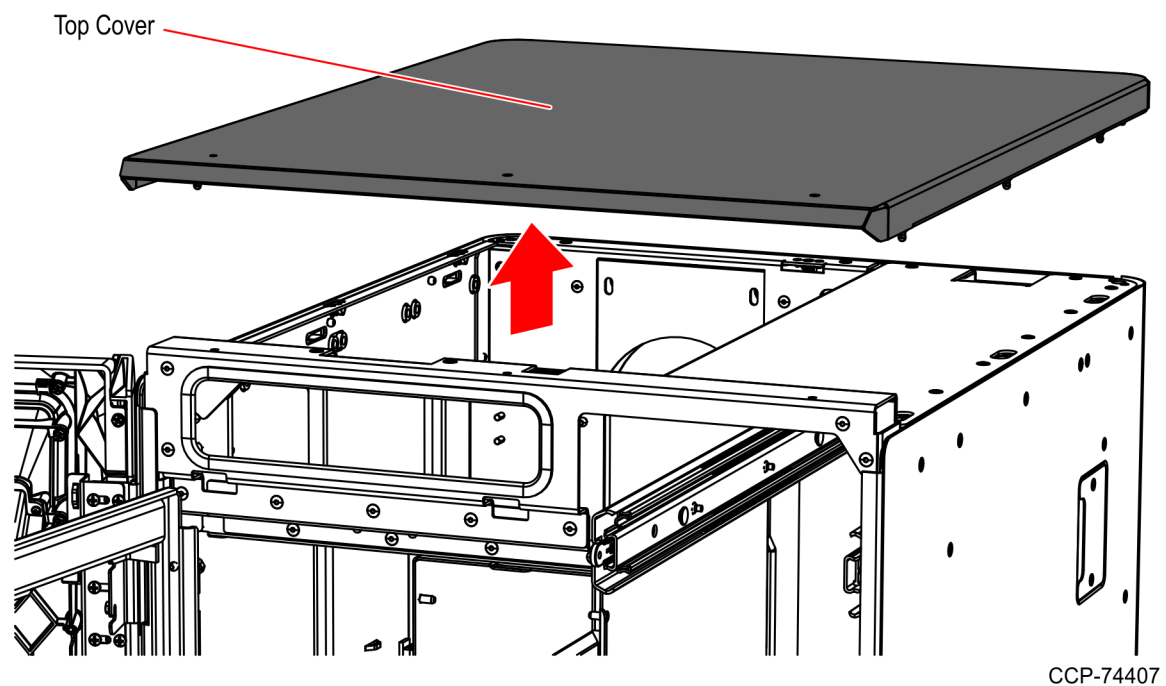


6. Install the R6 CTM Custom Top Plate. For more information refer to "[Installing R6 CTM Custom Top Cover](#)" on the next page.

# Installing R6 CTM Custom Top Cover


To install the R6 CTM Custom Top Cover, follow these steps:

1. Remove the Top Cover from the main unit. For more information refer to "[Removing the Top Cover](#)" on page 7.
2. Align the CTM Custom Top Cover with the holes on the main module as shown in the image below.

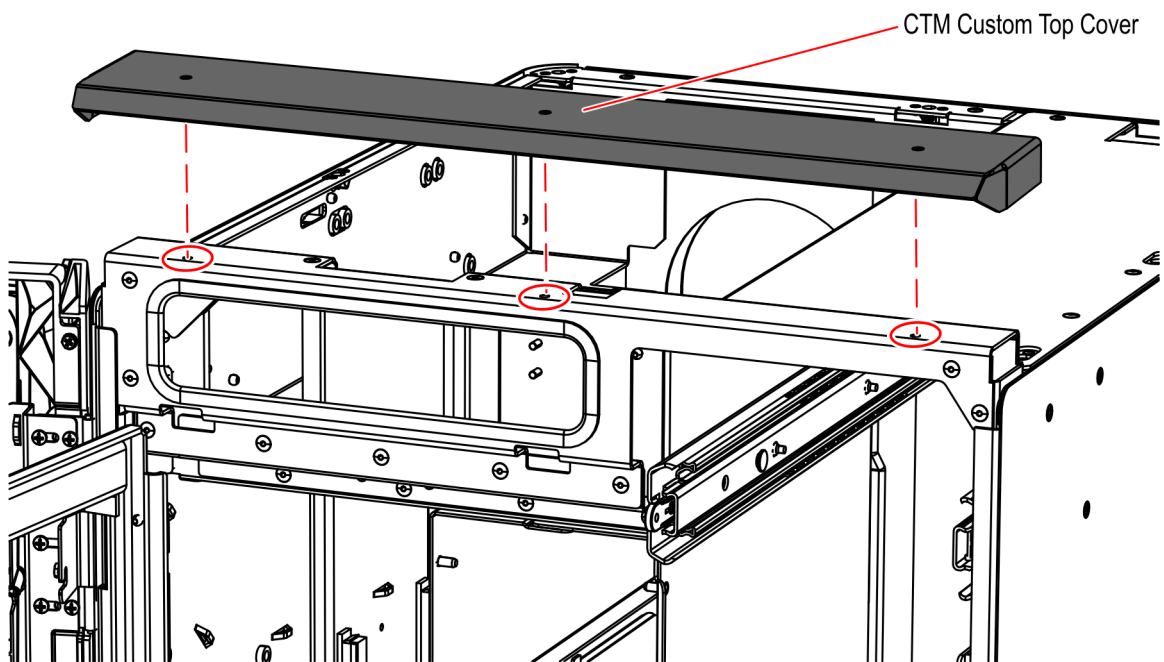

CCP-74408

3. Secure the CTM Custom Top Cover with three M4 nuts using an M4 Nut Driver as shown in the image below.

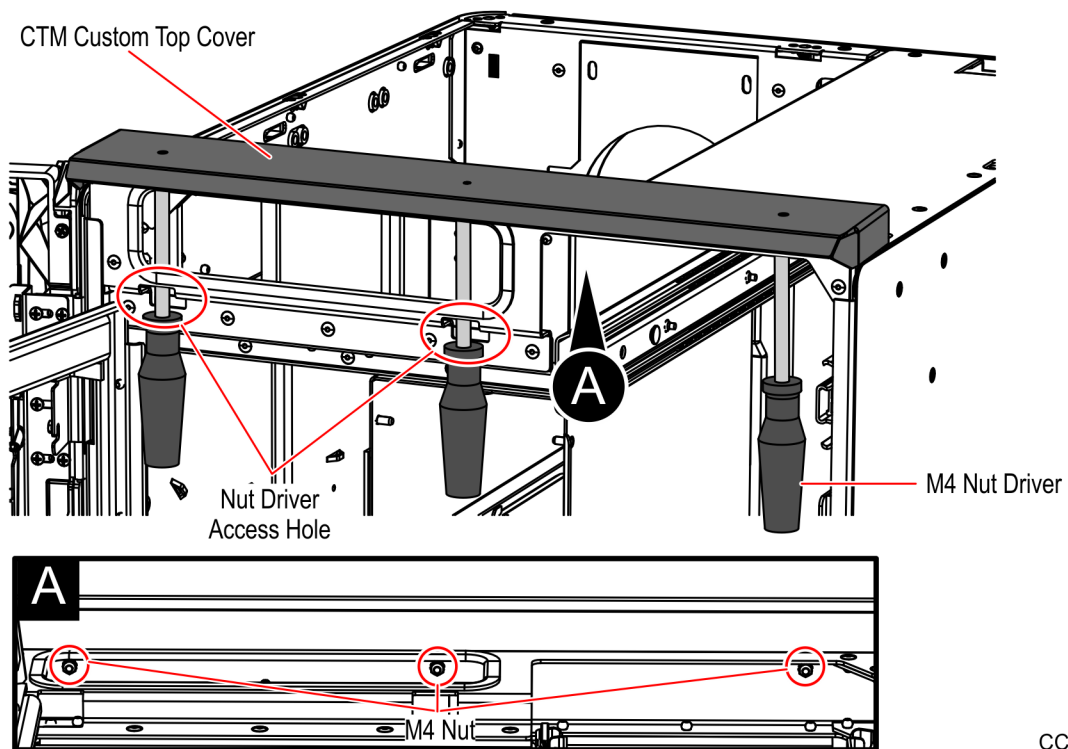

CCP-74409