



NCR Voyix 9700

5MP Camera, CX

9700-0088-7772



BCC5-0000-5792

Issue C

Copyright and Trademark Information

The product described in this document is a licensed product of NCR Voyix Corporation.

NCR Voyix Configurable Assemblies is a trademark of NCR Voyix Corporation in the United States and/or other countries. Other product names mentioned in this publication may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

Where creation of derivative works, modifications or copies of this NCR Voyix copyrighted documentation is permitted under the terms and conditions of an agreement you have with NCR Voyix, NCR Voyix's copyright notice must be included.

Disclaimer:

It is the policy of NCR Voyix Corporation to improve products as technology, components, software and firmware become available. NCR Voyix therefore reserves the right to change specifications without prior notice.

All features, functions and operations described herein may not be marketed by NCR Voyix in all parts of the world. In some instances, photographs are of equipment prototypes.

Therefore, before using this document, consult with your NCR Voyix representative or NCR Voyix office for information that is applicable and current.

© 2021–2025

By NCR Voyix Corporation

Atlanta, Georgia, USA

All Rights Reserved

Preface

Audience

This publication is written for hardware installer/service personnel, system integrators, and field engineers.



Note

This document is NCR Voyix proprietary information and is not to be disclosed or reproduced without consent.

Table of Contents


9700-0088-7772 5MP Camera, CX	6
Installation Procedure	7

Revision Record

Publication issue	Date	Description of change
A	Jun 2021	First issue
B	Dec 2021	Added Warning statement
C	Jul 2025	<ul style="list-style-type: none">• Updated to NCR Voyix brand.• Added IP book number.

9700-0088-7772 5MP Camera, CX

This publication provides a Camera for the NCR CX7 All-in-One POS (7772) or NCR CX5 All-in-One POS (7773).

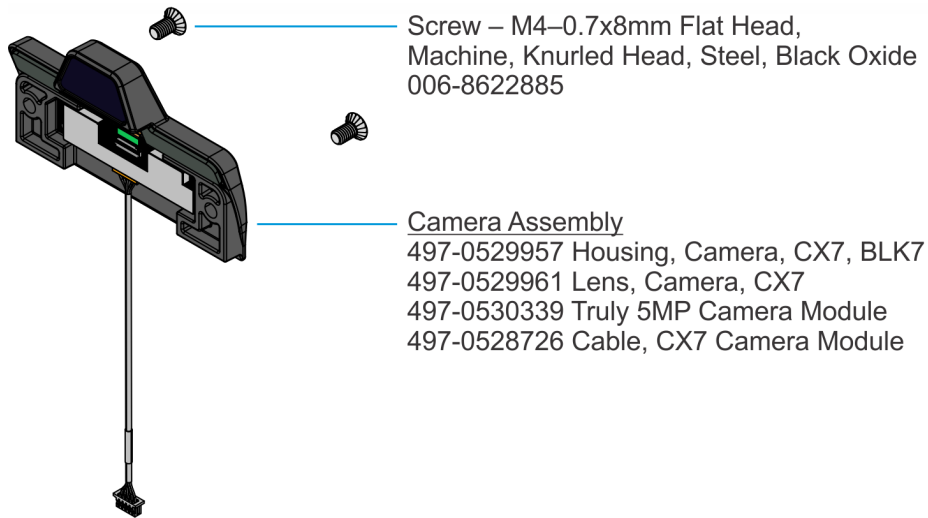

CCP-80939

Installation Procedure



Warning

Disconnect the AC power cord from the AC outlet and wait 30 seconds before servicing the terminal.


1. Lay the Display face down on a flat surface.



Note


Always use a soft material (cloth, foam) to protect the display screen when placing the terminal face down.

2. Remove the Cable Cover.
 - a. Remove the two (2) screws that secure the Cable Cover to the Back Cover.

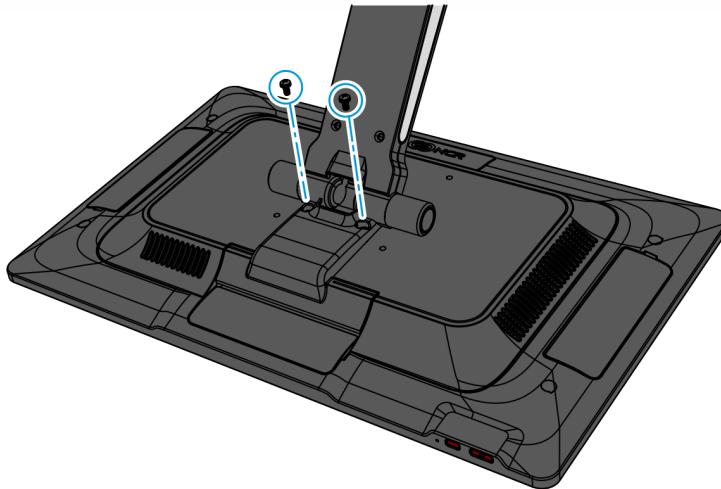

CCP-77013


- b. Rotate and unhook the Cable Cover from the Back Cover.

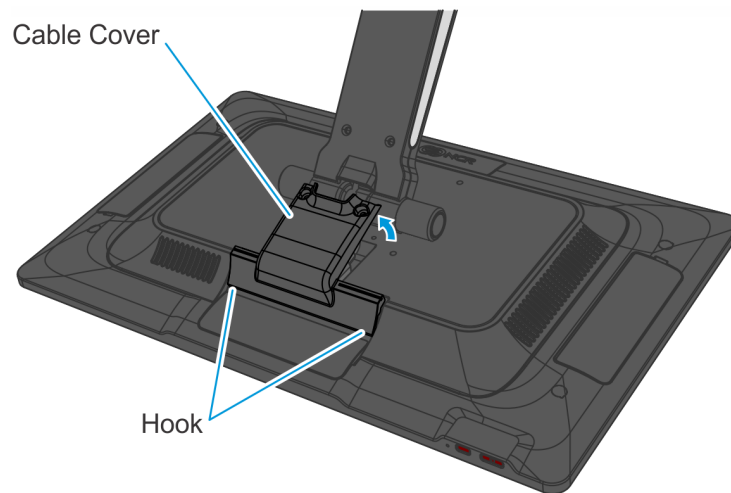


CCP-77014

3. Disconnect the Cables.

- a. Loosen the thumbscrew of the 180-degree USB-C Cable then disconnect the Cable.
- b. Remove the Ethernet Cable from the Cable Management Hook then disconnect the Cable.

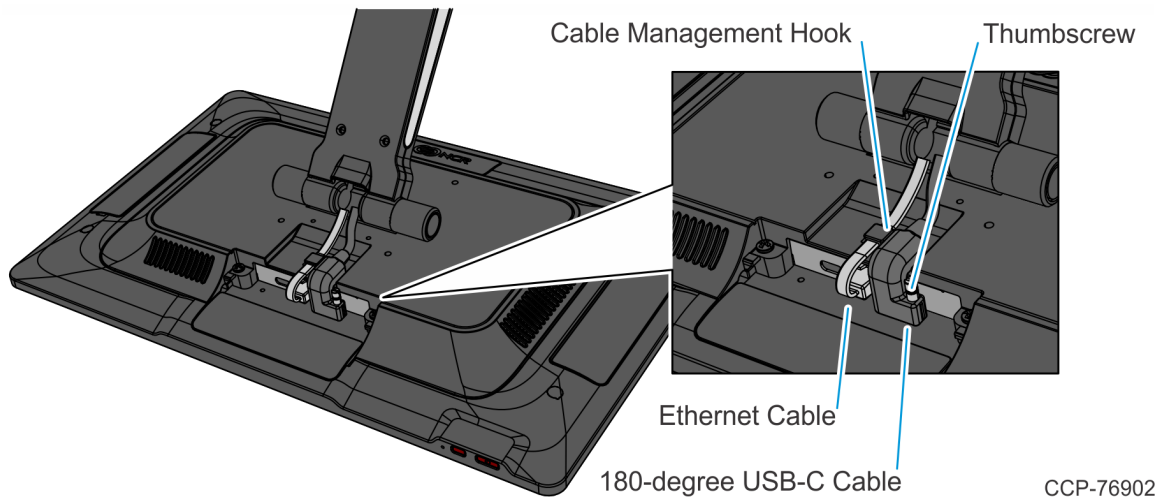


4. Lift the bottom of the Plate (Logo Badge) to unsnap it from the display housing.

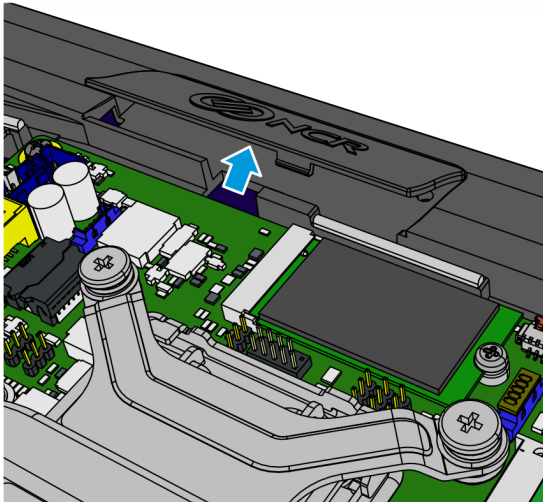


CCP-76925

5. Connect the Camera Cable to the Motherboard.

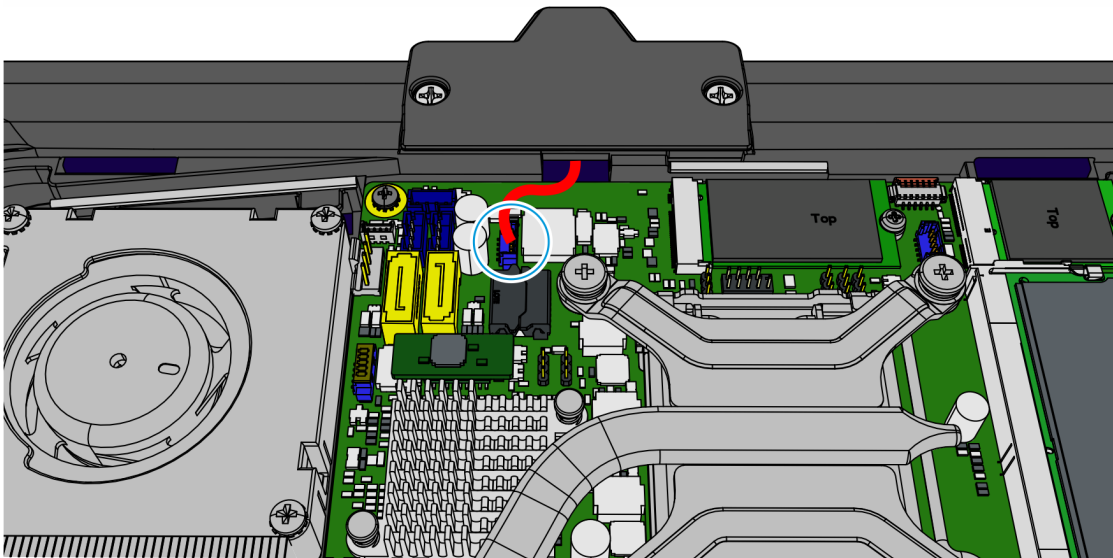

CCP-80938

6. Install the Camera on the display housing (2 screws).

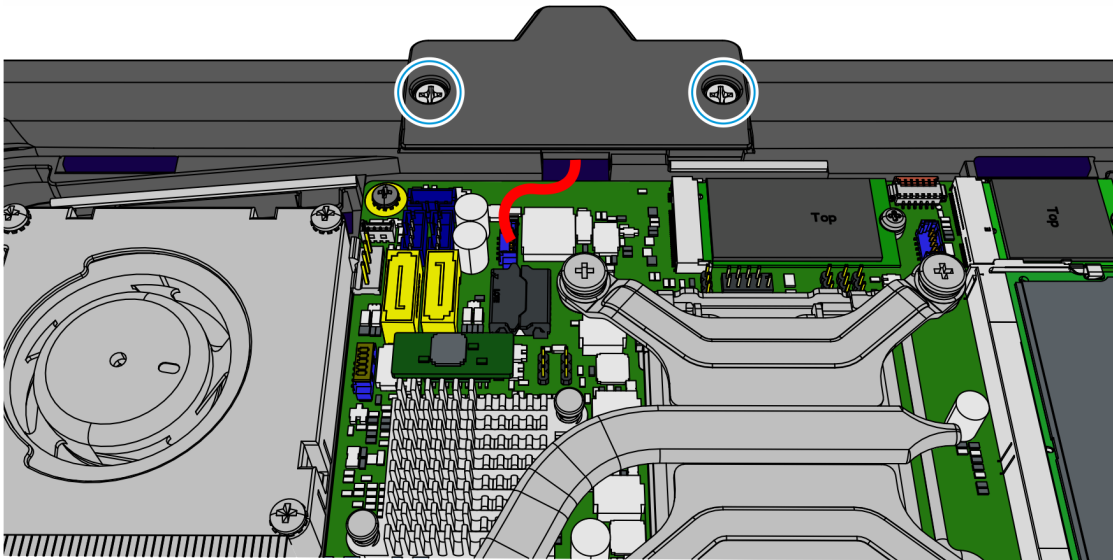

CCP-80937

7. Reinstall the Display Back Cover.
8. Reconnect the 180-degree USB-C Cable and Ethernet Cable.
9. Reinstall the Cable Cover.